


**MILLER**® CFS-2 Fiber Optic Stripper

Operating Instructions

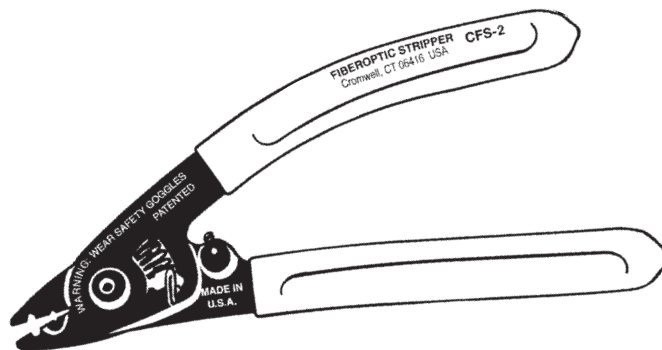

1. Always wear safety glasses when working with optical fiber.
2. The larger stripping notch at the tip of the tool with a 1.0 mm diameter can be used to strip many fiber jackets. Close the tool around the jacket, hold firmly and strip off jacket material.
3. If there is a Kevlar® central strength member, this must be trimmed with a Kevlar cutter like the Miller 86 1/2SF Kevlar Shears or Miller FOKC.
4. The smaller stripping notch close to the pivot point is designed to remove 250µm buffer from 125µm fiber.
  - a) Insert the fiber into the smaller notch of tool
  - b) Close the tool squarely with the fiber, hold firmly
  - c) Draw the tool towards the end of the fiber exerting steady pressure. We recommend several short strips be made to acquire the desired finished length.
5. Always make sure the fiber stripping notch is clean and clear of any debris. If not clean, the tool will break fiber rather than strip it.
6. Tool may be cleaned with Miller FS400 Bifurcated Foam Tip Swipe or a soft bristle brush.

WARRANTY: The Ripley Company warrants that our line of tools are free of defect and fully operable at the time of shipment. The warranty is limited to the repair or replacement of any product which proves to be defective in material or workmanship, under normal use and service.



46 Nooks Hill Road Cromwell, CT 06416  
860-635-2200 [www.ripley-tools.com](http://www.ripley-tools.com)

46448 08/06 JA