


ValidatorPRO[™] and ValidatorPRO-NT Provided by www.AAATesters.com

Ethernet Network Management Tools

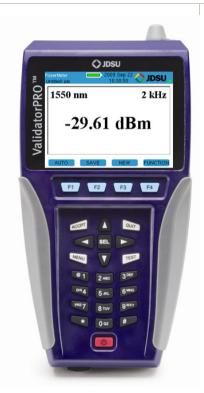

Key Features

Measures optical power on single mode and multimode fiber

JDSU NT905 Specs

- Conducts BER testing to speed certify Ethernet data transmission speed up to 1000BASE-T (1 Gb/s)
- Measures SNR and skew to uncover impairments to electrical Ethernet data transmission
- Tests for opens, shorts, split pairs, miswires, and reversals and measures distance to opens and shorts—supports all copper network, telco, and coax cables
- Measure PoE voltage and current (NT only)
- Performs port discovery to detect advertised Ethernet speed and displays capabilities of network devices (NT only)
- Pings network devices to verify connectivity to active equipment (NT only)
- Discover and display essential information regarding functionality of 802.11 b/g/n wireless devices (NT only)
- Includes Plan-Um^{*} software to create network layout; document cable tests; show network topology; and record moves, adds, and changes

Applications

- Certify speed capability of electrical Ethernet cable runs to support 10/100/1000 Mb/s Ethernet applications
- Ensure configuration and connectivity with active network devices
- Measure optical power and insertion loss
- Discover and display essential information regarding functionality of 802.11 b/g/n wireless devices
- Document network topology including moves, adds, and changes

Building on the capabilities of the JDSU Validator and Validator-NT, the JDSU ValidatorPRO series of Ethernet Network Management Tools offers a complete solution to test copper and fiber Ethernet cables. The ValidatorPRO Ethernet speed certifier with integrated optical power meter and accompanying Plan-Um cable management software delivers the power to test both copper and fiber cabling, determine if cables can support Gigabit Ethernet, and perform troubleshooting for cable installations. The ValidatorPRO performs all tests offered by the Validator and Validator-NT, including speed certifying the data-carrying capabilities of copper Ethernet network cables up to 1 Gb/s by testing for noise in the network, detecting faults in the cabling wiring, and ensuring that cables can support the speed capabilities of active equipment.

To certify Ethernet speed performance of cable runs, the ValidatorPRO series of handheld testers conducts bit error rate (BER) tests by sending data packets down specified cable runs at defined data rates to check for errors at the maximum throughput of the link. The ValidatorPRO also reports on signal quality that can impact high-speed data transmission by measuring signal-to-noise ratio (SNR). Skew measurements provide the signal time delay between pairs that can impact Ethernet data transmission. The ValidatorPRO also provides continuity testing that detects opens, shorts, miswires, split pairs, reversals, and high-resistance faults while accurately measuring distance to faults and total cable length.



Test fiber and copper (telco, network & coax) cables

The ValidatorPRO includes an integrated optical power meter that measures optical power at 850/1300/1310/1490/1550 nm on multimode or single-mode fiber to address an increasing number of Ethernet networks that now include optical links.

The ValidatorPRO-NT version includes a comprehensive set of features for testing a network's active network capabilities: measure Power over Ethernet (PoE) to ensure the correct power is available on the correct pins, use port discovery to ensure the correct speed and duplex capability are available; connect at gigabit Ethernet and run ping tests to verify connectivity to IP hosts; discover network devices using Cisco Discovery Protocol (CDP) or Link Layer Discovery Protocol (LLDP), discovery and display essential information regarding functionality and configuration of 802.11 b/g/n networks.



Shows optical power levels in dB or dBm

votive N	WIFI Netwo	orks			-
Level	Mode	SEC	Pr	СН	SSID/MAC
0%	Managed	off	b/g	6	00:21:63:83:5E:9C
0%	Ad-Hoc	off	b	11	"Free Public WIFI" 42:47:58:1F:DD:BF
0%	Managed	on	g	11	"NPPCAM" 00:0F:B5:36:C4:61
0%	Managed	on	b/g/n	9	"Spire Network"

Shows available wireless networks and relevant information

Plan-Um Cabling Installation and Planning Software

ValidatorPRO includes the updated powerful Plan-Um planning and reporting software used to plan network architectures, organize cable information, estimate cable length requirements, and document test results. Plan-Um helps set up each job, defines the scope of the job, aids in testing cable runs, and produces reports for the installer and customer. The Network Tools feature provides a quick view of the network architecture and lets users document moves, adds, and changes.

Used in conjunction with Plan-Um, ValidatorPRO provides confidence in the physical properties of cable runs and the overall capability of the network.

3

Plan the job, conduct tests, document results

O Layout

- Create custom floor plans or import existing AutoCAD or Visio files
- · Show specific ports: network, telephone, cable
- Indicate cable runs
- Print or e-mail layout for approval
- · Save layouts for future jobs
- · Automatically create cable test schedule
- · Cable list shows run start and end points


O Speed Certification and Continuity Test

- Certifies Ethernet transmission speed up to 1 Gb/s using full Bit Error Rate (BER) test by sending data packets across cable runs
- · Conducts measurements to detect noise and delay that affect data transmission: Skew and overall SNR

Ocument and Archive

- · Verifies all tests are done against the plan
- Shows PASS/FAIL, cable length, and speed rating
- Provides end-of-job report for billing purposes
- · Stores finished jobs for reference to support moves, adds, and changes
- Can store data on a PC or directly on the ValidatorPRO test unit

c	shie Test Sched									00
Pr	ge Setup Print	Preview 🎳	6 n a g	1						
	Add Cable(s)	Del	eler Cathle(s)	Define Cable(s)	0	ble Manager				
	To	Type	Toot Jack	Use	Longth	Rocult	Bundle Type	Bundlo #	Calor	Response Pla
1	U1NetU5	CA15	Data	Network.		? UNTESTE.	NA.	NA		? NODATA
2	01Net04	CAT5	Date	Network:		? UNTESTE.	NA	NA		P NO DATA
3	01Ne01	CAT5	Date	Network.		? UNTESTE.	N4	NA		? NO DATA
4	01Not02	CATS	Data	Notwork:		? UNTESTE.	NA.	NA		? NO DATA
5	UTPhone02	Security	2Wire	Security		? UNTESTE.	NA	NA		? NODATA
8	01Phone04	Security	2Wine	Security		? UNTESTE.	NA	NA		? NODATA
7	01Phune03	Security	2Wine .	Security		? UNTESTE.	NA	NA		? NO DATA
8	01Phone01	Security	2Wire	Security		? UNTESTE.	NA	NA		? NO DATA
9	01Phone01A	Security	2Wire	Security		? UNTESTE.	NA.	NA		? NO DATA
10	0113/04	CATSE	Deta	CCTV		? UNTESTE	NA	NA		? NODATA
11	01TV02	CATSE	Data	CCTV VT30		? UNTESTE.	NA	NA		? NODATA
12	01TV03	CATSE	Dela	CCTV		? UNTESTE.	NA.	NA		? NODATA
13	01TV01	CATSE	Data	CCTV		? UNTESTE.	NA.	NA		? NO DATA
14	0111/05	CATSE	Data	CCTV		? UNTESTE.	NA.	NA		? NODATA
15	01TV06	CATSE	Date	OCTV VT30		? UNTESTE.	NA	NA		? NODATA
16	01TV01AA	CATSE	Data	OCTV VT00		? UNTESTE.	NA	NA		? NO DATA
17	01TV01A	CATSE	Data	CCTV		? UNTESTE.	NA	NA		2 NO DATA



ID	Туре	From	То	Result
Cable001	CAT3 💌	01 Net01	01 Panel01	🗸 PASS
Cable002	CAT5 💌	01 Net02	01 Panel01	%⊮ 100Mb
Cable003	CAT5E 💌	01 Net03	01 Panel01	‱ 1000MI
Cable004	RG-6 🔻	01TV01	01 Panel01	🗸 PASS
Cable005	CAT5E 💌	01 Net04	01 Panel01	‱ 1000 MI
Cable006	CAT5E 💌	01 Net05	01 Panel01	🗶 FAIL
Cable007	CAT6 🔻	01 Net06	01 Panel01	%≽ 1000 MI
			/	

Measures cable length and distances to opens and shorts using advanced TDR technology

Skew and SNR results

nti, ed1.job	08:19:18		
Length Max: 300 ft	Skew Max: 35ns	SNR Min: 20dB	4
A 11.4 ft	.0.0	30.8	
B 10.9 ft	0.0	31.4	
C10.7 ft	0.0	31.0	÷,
D10.3 ft	0.0	30.8	
BERT Results: 0 error	3		

Wiremaps individual runs to locate and identify cable routes

Tests telephone, network, coax, and security/alarm cables for continuity, proper termination, and polarity

Shows the actual error rate in the **BER test**

🔿 JDSU

Cable 1	Test Schedule Date: 12.10.0 Time: 1:30 pt
Site Information	Contractor Information
Job ID: 041112	Test-Um Inc.
Residentail	Noah Xiong
John Homeowner	(805) 383-1500
(555) 777-8888	nxiong@test-um.com
john@wahoo.org 8769 Generic Street	808 Calle Plano
	Camarillo
Springfield	CA
MS	93012
89763	USA
USA	
Dertified by:	
(INSTALLERS SIGNATURE)	(INSTALLER COMPANY)

CABLE ID	то	FROM	TYPE	CBL_CAT	USE	LENGTH	RESULT
Cable001	01Plate04	01Panel01	CAT3	Phone		339 ft	V PASS
Cable002	01Phone02	01Plate04	CAT3	Phone	Phone	339 ft	V PASS
Cable003	01Plate05	01Panel01	RG-6	2Wire		4 ft	V PASS
Cable004	01TV01	01Plate05	RG-6	2Wire	TV	2 ft	V PASS
Cable005	01Comm01	01Spkr04	Audio	2Wire	Speaker	2 ft	V PASS
Cable006	01Comm01	01Spkr02	Audio	2Wire	Speaker	10 ft	X FAIL
Cable007	01Comm01	01Spkr01	Audio	2Wire	Speaker	12 ft	V PASS
Cable008	01Comm01	01Spkr03	Audio	2Wire	Speaker	13 ft	X FAIL
Cable009	01Fire01	01Panel01	Fire	2Wire	Fire	6 ft	V PASS
Cable010	01Fire03	01Panel01	Fire	2Wire	Fire	1 ft	V PASS
Cable011	01Plate01	01Panel01	CAT3	Phone		340 ft	V PASS
Cable012	01Phone01	01Plate01	CAT3	Phone	Phone	340 ft	V PASS
Cable013	01Plate01	01Panel01	CATE	Data -		31 ft	1000MB
Cable014	01Net01	01Plate01	CAT6	Data	Network	31 ft	1000MB
Cable015	01Plate02	01Panel01	CATSE	Data		15 ft	1000MB
Cable016	01Plate02	01Panel01	RG-6	2Wire		4 ft	V PASS
Cable017	01Plate02	01Panel01	CAT3	Phone	.~1	335 ft	✓ PASS
Cable018	01Plate03	01Panel01	CAT3	Phone		336 ft	✓ PASS
Cable019	01Plate03	01Panel01	RG-6	2Wire		4 ft	✓ PASS
Cable020	01Fire02	01Panel01	Fire	2Wire	Fire	6 ft	× FAIL
Cable021	015et01	01Percel01	BG.50	2Mire	Satellite	4.0	V PASS



Specifications

General

Display	Color back-lit FSTN liquid crystal display (LCD)
Operating	System Linux
Keypad	Full navigations set with alphanumeric data entry
	and soft-key functions
Memory	Non-volatile memory: internal NAND flash memory
	Volatile memory: 128 MByte DDR2 SDRAM memory

Languages supported (GUI) English, French, Italian, German, Spanish, Portuguese, Korean, and Simplified Chinese

Interfaces

- USB 2.0 host port (for external memory sticks)
- Optical Power meter for 850/1300/1310/1490/1550 nm wavelengths. -45 to +10dBm dynamic range for 850nm and -50 to +10 dBm for all other frequencies. ± 0.20 dB accuracy. ±0.06dB linearity. Measured in dB or dBm. Auto wavelength selection with 270, 330, 1k, 2kHz modulation Wi-Fi 2.4 GHz 802.11 b/g/n standards with MIMO technol-_
- ogy. Support 64/128-bit WEP encryption, WPA, WPA2, and CISCO CCX security

Ordering Information (Models, options and accessories)

Test Connectors

- 8-position shielded modular jack (data)
- 6-position modular jack (telephone)

- F-coax (video) Male connector w/sacrificial adapter
- 2.5 mm universal push pull (UPP) (Fiber) _

Cable Types

- Shielded or unshielded twisted pair network cable
- Telephone
- Coax
 - Single mode and multi mode fiber cable

Cable Length

Maximum cable length: 100 meters (1,500 ft) Maximum cable length for testing of split pairs: Up to 100 m (327 ft), depending upon cable type Cable length accuracy ±5% (after performing both unit and cable calibration)

Electrical

Liccultur	
Power sources:	AC adapter; auto cigarette lighter
	power adapter; lithium-ion rechargeable,
	removable batteries
Environmental	
Operating temperature	e 0 to 50°C (32 to 122°F)
	(normal operation, not charging battery)

	(normal operation, not charging battery)
	0 to 45°C (32 to 113°F) (charging battery)
Storage temperature	-20 to 60°C (-4 to 140°F)
Operating humidity	10 to 85% RH,
	non-condensing

Shock and Vibration min	imum 2 ft drop
	(free fall from stationary) on concrete
Safety:	EN 61010-1
EMI/EMC:	EN 61326-1:2006
Altitude:	4000 m
Agency Certificati	ons and Compliance
Main and Remote units:	CE
Battery:	CE
AC wall adapter:	CE, PSE, UL
Auto cigarette lighter po	wer: CE
Calibration	
Traceable Calibration Per	iod: 2 Years
Self-Calibration Period:	30 days for unit calibration
	Perform cable calibration whenever
	changing cable type being measured
Physical	
Main Unit Size	22.9 x 11.4 x 5.3 cm (9 x 4.5 x 1.8 in)
Weight	710 gm (1 lb 9 oz) with battery
Remote	
Size	14.2 x 11.2 x 4.4 cm (5.6 x 4.4 x 1.8 in)
Weight	341 gm (12 oz) with battery

Part #

ValidatorPRO Ethernet speed certifier with integrated optical power meter	NT1150
ValidatorPRO-NT Ethernet speed certifier with integrated optical power meter including active network tests	NT1155
ValidatorPRO and ValidatorPRO-NT each include the following:	

Onesmantermoteponsect-8wiremappingremotes(RJ11/RJ45)(TP612));wdithium-iorrechargeablebatteries(NT93);twouniversalACadapter/chargeeunitspne183m(72in)USBclient-to-PCconnection cable/seriesAbluctoseriesBolucit.wo19cm/7.5inRJ12-to-RJ12cablesformo-faultconnectiontoRJ11orRJ45iackstwc30.48cm/1ftbatchcableswithRJ45connectorstwc60.96cm/2ftiRJ45to 8 alligator clips cord sets, two sacrificial cables for RJ45 mod plug, one coupler F-jack to F-jack, USB drive including Plan-Um cabling installation and planning software, user guide (product manual), firmware, and quick start guide, Deluxe carrying case, Printed quick start guide, 100 "speed certified" cable labels, one 12 V vehicle charger

Accessories	
Lithium-ion rechargeable battery	NT93
1.83 m (72 in) USB cable assembly	NT94
Cable speed certified labels, roll of 100	NT95
19 cm (7.5 in) RJ12-to-RJ12 cable for no-fault connection to RJ11 or RJ45 jacks	TP20
30.48 cm (1 ft) patch cable with RJ45 connectors	TP55
F-connector plug to BNC jack adapter	TP62
60.96 cm (2 ft) RJ45 to 8 alligator clips cord set	TP68
Sacrificial cable for RJ45 mod plug	TP74
Set of 20 (1–20) Coax ID-only remotes	TP311
Set of 20 (1-20) RJ45 ID-only remote identifiers	TP312
Set of 20 (1-20) RJ11 ID-only remote identifiers	TP314
OLS-5 Optical MM LED Source 850/1300nm, ST connector type	2255/01
OLS-6 Optical SM Laser Source 1310/1550, FC connector type	2255/02
Inspection & Cleaning Kit 200/400X FBP Probe, HD3-P4 Display, FBPT Tips (SC, LC), FMAE Adapters, (U25M, U12M),	
Bulkhead/Patchcord Cleaning Tools (2.5mm & 1.25mm), Case & power supply/charger	FBP-SM05-C
Inspection & Cleaning Kit - same as FBP-SM05-C but with HD3 Display	FBP-SM03-C
Visual Fault Locator - Pocket Size, 2.5mm (SM & MM)	FFL-050
1.25mm UPP adapter	FITP-UPP12



ValidatorPRO NT1150 ValidatorPRO-NT NT1155

Test & Measurement Regional Sales

NORTH AMERICA	LATIN AMERICA	ASIA PACIFIC	EMEA	www.jdsu.com/know
TEL: 1 866 228 3762	TEL: +1 954 688 5660	TEL: +852 2892 0990	TEL: +49 7121 86 2222	
FAX: +1 301 353 9216	FAX: +1 954 345 4668	FAX: +852 2892 0770	FAX: +49 7121 86 1222	