FLIR T420 Specs Provided by www.AAATesters.com

T-SERIES

THERMAL IMAGING CAMERAS FOR PREDICTIVE MAINTENANCE


UNLEASH THE ULTIMATE POWER OF






T-SERIES

THE ULTIMATE THERMAL IMAGER

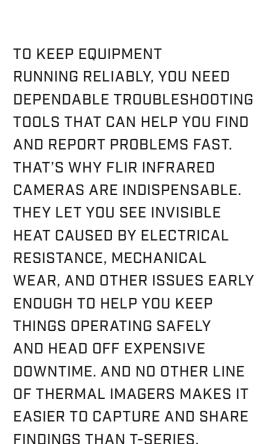



PRODUCTIVITY BOOST

- Touchscreen tools as intuitive as a smartphone's
- Simple buttons to access the interface with gloved hands
- GPS & Compass embed pointing direction and geo-location
- LEDs to light darker areas and a laser pointer to mark locations
- Easy voice, text, and sketch annotations, stored in radiometric images


FAST COMMUNICATION

- FLIR Tools Mobile app links T-Series to smartphones & tablets for immediate image analysis and sharing from the field plus streaming video and remote control for safer monitoring
- MeterLink® transmits FLIR T&M data to the camera, for instant integration into images and reports
- FLIR Tools software for PC & Mac provides extra documentation power and camera firmware updates
- Radiometric recording to memory card



OPTIMUM ERGONOMICS

- Rotating optical block points 120° up and down for easier aiming and viewing
- Auto Orientation switches onscreen temperature data to portrait or landscape
- The fastest auto focus and manual control for precision imaging
- T640 & T660 feature Continuous Auto Focus for automatic clarity wherever you aim



ULTIMATE RESOLUTION & SENSITIVITY

- Up to 640 x 480 native resolution
- Up to 1.2 MP thermal resolution with UltraMax™ a 4x improvement
- MSX® Enhancement on live video, stored images, and UltraMax images
- Class-leading sensitivity of up to <0.02°C for outstanding image quality
- Temperature calibrations up to 2,000°C









VIEWFINDER FOR BRIGHT CONDITIONS

HELPFUL ACCESSORIES

- A range of interchangeable advanced optics
- Additional batteries and chargers
- Spare cables and SD cards
- Camera pouches and tripod adapters
- FLIR IR Windows






T-SERIES THE ULTIMATE FEATURES



INTUITIVE TOUCHSCREEN

Tap the screen or buttons to quickly access temperature measurement tools, parameters, image modes, and more.





FLIR TOOLS FOR PC & MAC OS

Included software for indepth image analysis, report generation, and more.



Joystick & large backlit buttons for gloved operation.

3.5" bright touchscreen for quick access to images, camera tools, & analytics.



T640 viewfinder makes surveys in the brightest environments even easier.

Large 4.3" capacitive touchscreen puts fast tools at your fingertips.

METERLINK



FLIR TOOLS MOBILE APP



T420, T440 & T460

FLIR T420, T440, and T460 cameras deliver 76,800 pixels of vivid thermal resolution, UltraMax image enhancement, advanced interchangeable lenses to fit the view and spot size you need, and more productivity features than ever to help ease your demanding workload.




T600, T620, T640 & T660

The T600 produces crisp 480 x 360 thermal imagery, while T620, T640, and T660 cameras offer the highest FLIR handheld IR precision at 640 x 480 resolution delivering 307,200 pixels, plus UltraMax image enhancement. The greater the resolution, the easier it is to see, find, and reliably measure heat issues on smaller, distant components.



T-SERIES THE ULTIMATE RESOLUTION

ULTRAMAX AND MSX COMBINE TO TURN T-SERIES CAMERAS INTO THE MOST POWERFUL INFRARED IMAGING AND NON-CONTACT TEMPERATURE MEASUREMENT TOOLS ON THE PLANET, ALL IN A COMPACT, EASY-TO-USE DESIGN.

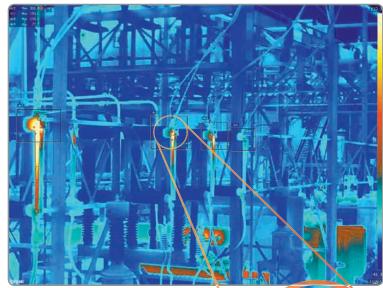

ULTRAMAX

FLIR's new UltraMax is a unique image processing technique that allows you to generate reports with images that have four times as many pixels, and 50% less noise, so you'll be able to zoom in on smaller targets and measure them more accurately than ever.



UNMATCHED RESOLUTION AND MEASUREMENT PERFORMANCE EVEN AT 8X ZOOM



MSX ENHANCEMENT

FLIR's patented multi-spectral dynamic imaging (MSX) etches vital image detail from the visible light image onto the thermal image to help you see where problems are quickly and easily without compromising any of your temperature measurement data.

SPECIFICATIONS

Model	T420	T440	T460	
Thermal Resolution		76,800 (320 × 240)		
Thermal Sensitivity	<0.04°C	<0.04°C @ 30°C		
Accuracy	+/-2°C (+/-3.6°F) or +/-2% of reading, wh	+/-2°C (+/-3.6°F) or +/-2% of reading, whichever is greater, at 25°C (77°F) nominal		
Temperature Range	-4°F to 1,202°F (-20°C to 650°C) Optional: to 2,192°F (1,200°C)	-4°F to 2,192°F (-20°C to 1,200°C)	-4°F to 2,732°F (-20°C to 1,500°C)	
Measurement Modes	7 presets: center spot; hot spot (box max); cold spot (box min); 3 spots; hot spot - spot (box max + spot + delta); hot spot - temperature (box max + ref temp + delta); no measurements	6 presets: center spot; hot spot (box max); cold spot (box min); no measurements; 2 user presets		
UltraMax	•	•	•	
Radiometric Recording			CSQ to memory card	
User Presets		•	•	
Frame Rate	60 Hz			
Lens Choices	6°, 15	6°, 15° Tele, 45° & 90° Wide; Close up: 100 μm, 50 μm		
Focus	Manual & Automatic			
Display Size	3.5"			
Touchscreen	•	•	•	
Viewfinder				
Built-in Visual Camera	3.1 MP			
Digital Zoom	4×	8x		
Compass	•	•	•	
GPS				
Sketch on IR/Visual Image		Draw or add predefined stamps		

SEE FULL T-SERIES SPECIFICATIONS AT WWW.FLIR.COM/THERMOGRAPHY



FLIR 2-5-10 WARRANTY

All T-Series cameras are covered by our revolutionary FLIR 2-5-10 Warranty when registered within 60 days of purchase.

- 2 Years on Camera Parts & Labor
- 5 Years on Li-Ion Batteries
- 10 Years on the IR Detector

Only FLIR can provide peace of mind like this because only FLIR makes all of the camera's critical components from the ground up.



T600	T620	T640	T660	
172,800 (480 × 360)		307,200 (640 × 480)		
<0.04°C @ 30°C		<0.03°C @ 30°C	<0.02°C @ 30°C	
+/-2°C (+/-3.6°F) or +/-2% of reading, whichever is greater, at 25°C (77°F) nominal			+/-1°C (+/-1.8°F) or +/-1% of reading for limited temperature range; ±2°C (±3.6°F) or 2%, whichever is greater, at 25°C (77°F) nominal.	
-40°F to 1,202°F (-40°C to 650°C)	-40°F to 1,202°F (-40°C to 650°C) Optional: to 3,632°F (2,000°C)	-40°F to 3,632°F (-40°C to 2,000°C)		
6 presets: center spot; hot spot (box max); cold spot (box min); no measurements; 2 user presets				
	•	•	•	
			CSQ to memory card	
•	•	•	•	
30 Hz				
25°, 7° & 15° Tele, 45° & 80° Wide; Close up: 100 μm, 50 μm, 25 μm				
Manual & Automatic		Manual, Automatic, and Continuous		
4.3"				
Capacitive touch screen				
		•	•	
5 MP				
4x		8×		
	•	•	•	
	•	•	•	
Draw or add predefined stamps				



SUPPORT FROM ITC

Expand your expertise, enhance your career, and get the most out of your camera with valuable courses from the Infrared Training Center. At ITC, you can get initial training and certified as a Level 1 Thermographer, or receive advanced training in specialized fields of thermography. ITC training is a vital investment to help you get the most out of your thermal camera.







ABOUT FLIR

All infrared cameras are not created equal, because infrared camera manufacturers are not all the same. FLIR stands above the rest.

The largest commercial infrared company in the world, FLIR has nearly 50 years of experience building and integrating high-performance infrared cameras, giving us a command of these specialized technologies that no one else can touch. FLIR's products are at work every day saving lives, protecting troops, and helping to keep borders and facilities safe.

Now, FLIR's cameras are available for your personal use, too. You can have a FLIR on your boat, your car, or even as a home security camera. The same FLIR technology in your maintenance camera is in Audi and BMW cars as a pedestrian detection system. And if you enjoy hunting and outdoor actives, there's an inexpensive FLIR for you, too. You might not know FLIR by name, but you have seen our products at work since the 1960's.

If you are looking for infrared camera products, you've come to the right place.

PORTLAND

Corporate Headquarters

FLIR Systems, Inc. 27700 SW Parkway Ave. Wilsonville, OR 97070 USA

PH: +1 866.477.3687

www.flir.com NASDAQ: FLIR

NASHUA

FLIR Systems, Inc. 9 Townsend West Nashua, NH 03063 USA

PH: +1 866.477.3687

PH: +1 603.324.7611

CANADA

FLIR Systems, Ltd. 920 Sheldon Court Burlington, ON L7L 5L6 Canada

Canada

PH: +1 800.613.0507

BRAZIL

FLIR Systems Brasil Av. Antonio Bardella, 320 Sorocaba, SP 18052-852

Brasil

PH: +55 15 3238 7080

BELGUIM

FLIR Commercial Systems Luxemburgstraat 2

2321 Meer Belgium

PH: +32 (0) 3665 5100

Equipment described herein may require US Government authorization for export purposes. Diversion contrary to US law is prohibited. Specifications are subject to change without notice. For the most up-to-date specs, visit our website: www.flir.com. ©2014 FLIR Systems, Inc. All other brand and product names are trademarks of FLIR Systems, Incorporated. Imagery used for illustration purposes only. 7836 ver. 2 Printed 10/2014

