



## 3M™ Dynatel™

Pipe/Cable Locators 2550

Pipe/Cable Locators 2550-iD

Cable/Pipe/Fault Locators 2573

Cable/Pipe/Fault and Marker Locators 2573-iD

Designed to be more accurate, faster and more integrated than any other locator on the market, the 3M™ Dynatel™ 2500 Series Locators and fault finders represent an advancement in locating and fault finding technology for the field professional. Offering a broad feature set with advanced digital processing, the 2500 Series locators combine simple interfaces with precision locating capabilities. All 2500 series locators offer six active frequencies and a maximum transmitter output of 12 watts providing a solution for virtually all challenging applications encountered in the field.

As with all 3M™ Dynatel™ Locator products, the 2500 series provides accurate pipe, cable or Sonde depth measurements, giving a digital readout in feet and inches, or centimeters (user-selectable). Lightweight, compact and well-balanced, these cable and pipe locators allow you to accurately and easily locate your underground plant and assets. The 3M™ Dynatel™ 2550-iD and 2573-iD have the additional capability to locate all standard electronic markers and to write, read and lock programmed information into 3M™ Electronic Marker System iD Markers. All 2500 series locators and fault finders are also compatible with select GPS/GIS field mapping instruments for real time mapping of electronic markers or pipe and cable facilities. Other user friendly features include the ability to enable or disable receiver frequencies and the ability to select audio sounds in the simple menu driven interface.




## 3M Dynatel 2573C Specs Provided by [www.AAATesters.com](http://www.AAATesters.com)

### Product Features

- Trace view mapping display mode
- 6 active frequencies for direct connect
- 4 induction frequencies with maximum allowed output power
- All frequency mode in direct connect – 4 simultaneously
- Automatic impedance matching
- Ohm meter with high voltage detection
- Rugged, industrial temperature range
- 240VAC output protection
- Standard alkaline (c-cell) batteries
- Rechargeable battery kit

New to the world features in the 3M™ Dynatel™ Locators 2500 series include the trace view mapping interface that provides an intuitive mapping display showing the utility path combined with a precision peak antenna based antenna array to provide the utmost confidence in utility location.

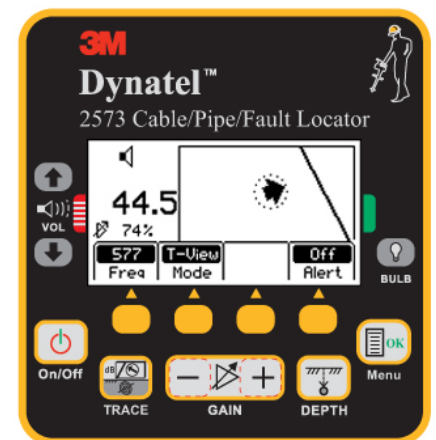



# 3M™ Dynatel™ Locators and Fault finders 2500 Series

## Ordering Information

		Cable/Pipe Locate	Earth Return Fault Locate	Electronic Marker Locate	US Receiver	International Receiver	US 12W Transmitter	International 12W Transmitter	Direct Connect Cable - small clips	Direct Connect Cable - large clips	3" Coupler	4.5" Coupler	Coupler Cable	A Frame	A Frame Cable	Ground Rod	2200RB Rechargeable Battery	Cigarette Lighter Adapter Cable	2200M Carrying Bag	Manual
Stock No. US Version Locators																				
80-6113-3450-1	2550-U12	■			■		■		■			■	■			■	■	■	■	■
80-6113-3452-7	2550-ID/U12	■		■	■		■		■			■	■			■	■	■	■	■
Export Version Locators																				
80-6113-3465-9	2550E-U12	■				■		■	■	■		■	■			■	■	■	■	■
80-6113-3466-7	2550E-ID/U12	■		■		■		■	■	■		■	■			■	■	■	■	■
US Version Fault Finders																				
80-6113-3458-4	2573-C12	■	■		■		■		■		■		■	■	■	■		■		■
80-6113-3460-0	2573-U12	■	■		■		■		■	■		■	■	■	■	■	■	■	■	■
80-6113-3462-6	2573-ID/C12	■	■	■	■		■		■		■		■	■	■	■	■	■	■	■
80-6113-3464-2	2573-ID/U12	■	■	■	■		■		■	■		■	■	■	■	■	■	■	■	■
Export Version Fault Finders																				
80-6113-3468-3	2573E-CU12	■	■			■		■	■	■	■		■	■	■	■	■	■	■	■
80-6113-3470-9	2573E-ID/CU12	■	■	■		■		■	■	■	■		■	■	■	■	■	■	■	■
Separate Transmitters																				
80-6113-3454-3	2550-T12						■		■	■						■	■	■		■
80-6113-3472-5	2573-T12						■		■	■						■	■	■		■
80-6113-3476-6	2550E-T12							■	■	■						■	■	■		■
80-6113-3471-7	2573E-T12							■	■	■						■	■	■		■

## A Reputation of Excellence

When you choose a quality 3M™ Dynatel™ Locator, you get outstanding performance and reliability, along with toll-free technical phone support and a service center dedicated to excellence. Our service center provides calibration, repair, upgrades and modifications for safety, performance and reliability.

## 2500 Series Specifications

### Transmitter Specifications

#### Cable/Pipe Trace Mode

Trace mode frequencies

2550/2573	577 Hz, 1 kHz, 8 kHz, 33 kHz, 82 kHz, 200 kHz, ALL *
2550E/2573E (International)	577 Hz, 1 kHz, 8 kHz, 33 kHz, 82 kHz, 133 kHz, ALL **

Output power (maximum)

12 W Max. with external input, reduced to 10 W at 33 kHz and 1 W for higher freq's

Induction mode only frequencies

2550/2573	8 kHz, 33 kHz, 82 kHz, or 200 kHz
2550E/2573E (International)	8 kHz, 33 kHz, 82 kHz, or 133 kHz

#### Sheath-Fault Locate Mode (2573 Only)

Fault locate frequencies 10/20 - sheath fault source

Fault mode trace frequencies 577, 33 kHz

#### Toning Mode (2573 Only)

Pulsing tone frequencies

2550/2573	577 Hz, 200 kHz
2550E/2573E (International)	577 Hz, 133 kHz

#### Ohmmeter Mode - continuity test

Range 0 to 10 Meg

Audible continuity tones Solid, Pulsed, None

#### Direct Connect Output

Output voltage (maximum) 70 Vrms

Output current (maximum) 0.75A rms

Output Protection 240 Vrms

#### Physical

Weight w/batteries 5.2 lbs. (2.4 kg)

#### Power Source

Battery Quantity and size 6 "C" alkaline (LR14)

Battery Life 40 hours typical (normal output level)  
10 hours typical (high output level)

External DC power 9-18 V DC

\* 577 Hz, 8 kHz, 33 kHz, 200 kHz

\*\*577 Hz, 8 kHz, 33 kHz, 133 kHz



3M™ Rechargeable Battery 2200RB



New 4.5 inch Dyna-coupler 4001 Standard on Utility Style Kits

# 2500 Series Specifications, continued

## Receiver

Cable/Pipe Trace Mode	
Trace mode options	Directional Peak, Directional Null, Special Peak, Induction Peak
Active frequencies	
2550/2573	577 Hz, 1 kHz, 8 kHz, 33 kHz, 82 kHz, 200 kHz
2550E/2573E (International)	577 Hz, 1 kHz, 8 kHz, 33 kHz, 82 kHz, 133 kHz
Passive frequencies	31.5 kHz (CATV) 15 kHz ~30 kHz (LF)
Power frequencies	50/60, 50L/60L, 50H/60H, 100/120 (CPS)
Auxiliary frequencies	512, 560, 640
User defined frequencies	0~999 ; up to four
Depth Accuracy	$\pm 2\% \pm 2$ in. (5 cm) for 0–60 in. (1.5 m) $\pm 6\% \pm 2$ in. (5 cm) for 60–120 in. (1.5–3.0 m) $\pm 10\% \pm 2$ in. (5 cm) for 120–180 in. (3.0 m–4.5 m) Depth Range 0–360 in. (0–914 cm) Marker depth accuracy $\pm 15\% \pm 2$ in. (5 cm)
Toning/External Mode	same frequencies as trace
Sheath-Fault Locate Mode (2573 Only)	10/20 - sheath fault direction
Physical	
Weight w/batteries	1.8–2.3 kg (4–5 lbs.) (model dependent)
Power Source	
Battery Qty.and size	8 AA (LR6)
Battery Life	30 hours typical

## System Specifications

Environmental	
Ingress Protection	IP54
Operating Temperature	-4°F to 122°F (-20°C to 50°C)
Storage Temperature	-4°F to 158°F (-20°C to 70°C)
Regulatory	FCC-CFR47 (Part 15), CE (Export versions)

3M and Dynatel are trademarks of 3M Company.

### Important Notice

All statements, technical information, and recommendations related to 3M's products are based on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. Any statements related to the product which are not contained in 3M's current publications, or any contrary statements contained on your purchase order shall have no force or effect unless expressly agreed upon, in writing, by an authorized officer of 3M.

### Warranty; Limited Remedy; Limited Liability.

This product will be free from defects in material and manufacture for a period of 12 months from the date of purchase. **3M MAKES NO OTHER WARRANTIES INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.** If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. **Except where prohibited by law, 3M will not be liable for any loss or damage arising from this 3M product, whether indirect, special, incidental or consequential regardless of the legal theory asserted.**



### Track and Trace Solutions

6801 River Place Blvd.  
Austin, TX 78726-9000  
800/426 8688  
Fax 800/626 0329  
[www.3M.com/dynatel](http://www.3M.com/dynatel)

Please recycle. Printed in USA.  
© 3M 2009. All rights reserved.  
75-4700-3000-0