

7000

NETWORK TESTING

OTDR MODULE SERIES

FTB-7000B/FTB-7000D/FTB-7000C



The all-new FTB-7000D: first-class benefits

- 1 m event dead zone: shortest in the industry
- Testing time: four times shorter than industry standard
- FTTx ready: passive optical network (PON) testing capability

EXFO's OTDR Module Series

- Extensive range of models covering all telecom testing applications
- Flexible design, allowing up to three wavelengths in a single module
- Housed in the FTB-400 Universal Test System or the FTB-100B Mini-OTDR



A Complete Line of OTDRs for Any Testing Situation

Today's telecom market imposes test challenges that stem from a never-before-seen variety of fiber-optic networks. Ultra-long-haul, high-fiber-count 10 Gb/s and high-speed DWDM networks. CWDM and 2.5 Gb/s metropolitan networks. Passive optical networks (PONs) and other types of access networks. All of these create increasingly specific and demanding testing requirements, making OTDRs more essential than ever for installing, maintaining and troubleshooting networks.

EXFO's OTDRs deliver the right tools for accurately detecting and characterizing splices, connectors, splitters, breaks and other events along a fiber link. The FTB-7000B provides a wide choice of configurations to conveniently test all types of networks. The FTB-7000D and FTB-70000C enables multiple-wavelength testing by combining triple-wavelength capability in a single module. Plus, the FTB-7000D offers extremely short dead zones—perfect for short-distance applications—and faster-than-ever acquisitions.

EXFO's OTDR modules meet all your testing needs with numerous singlemode and multimode configurations available at several wavelengths. Most important, they are field-interchangeable and compatible with both of EXFO's rugged, portable test platforms, the powerful FTB-400 Universal Test System and the compact FTB-100B Mini-OTDR.



OTDR modules are housed in EXFO's rugged field-testing platforms.



EXFO's OTDR modules deliver smooth performance both in inside-plant and outside-plant applications.

Get the Right Fit

- Module choices for testing flexibility
- Singlemode modules at 1310, 1410, 1490, 1550 and 1625 nm
- Triple-wavelength modules
- Multimode modules at 850 and 1300 nm
- Dynamic range of up to 45 dB
- EXFO Universal Interface (EUI) connector: UPC- and APC-compatible
- Visual fault locator (VFL) option, ideal for troubleshooting LAN/WAN and metro networks
- High fiber counts: Speed up ribbon fiber cable installation with the FTB-9100 Optical Switch. Choose between MTP (ribbon) or SC output connector types. Singlemode or multimode fiber switch modules are available.



The MTP and SC configurations of the FTB-9100 Optical Switch module.


EXFO's FTB-7000D OTDR easily tests through high-port-count splitters with high loss levels.

ToolBox OTDR Software: New Features That Boost Productivity

FTB-7000B/FTB-7000D/FTB-70000C


Multiple-Trace Comparison

Multiple-trace viewing lets you quickly compare traces and detect anomalies within fibers of a tube, a ribbon or even a whole cable.

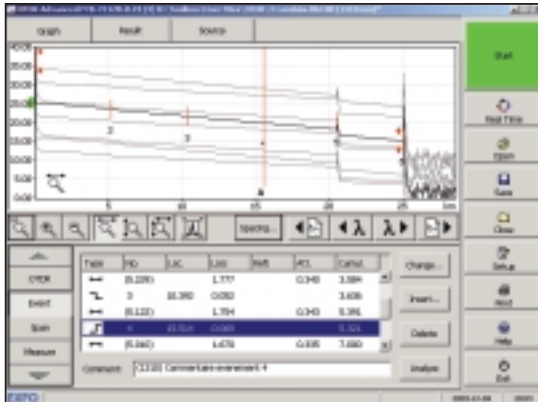




Great Display Legibility for Outdoors Work

For installation and maintenance crews, working outdoors goes with the territory. Switch between black and white display backgrounds as needed, and enjoy great legibility, even in the brightest daylight.

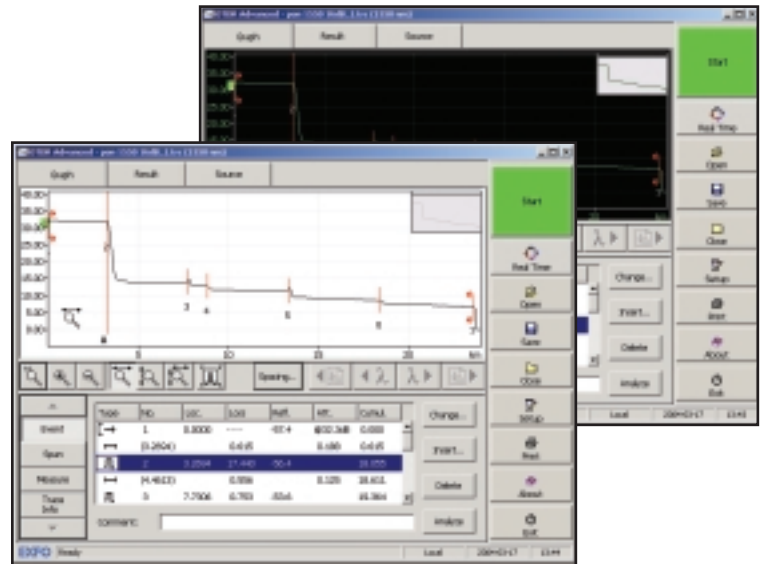

Time Savers from ToolBox OTDR Software

- Define the Pass/Warning/Fail thresholds for ribbon and multifiber validation to meet your specifications.
- Smooth data management: file autonaming utility with subset cable and fiber incrementation.
- Bidirectional analysis: take acquisitions from both fiber ends to obtain loss averages for each fiber event. Collect essential data for today's tighter loss budgets.

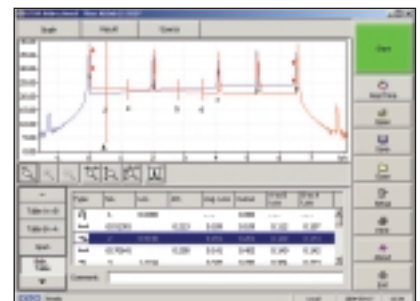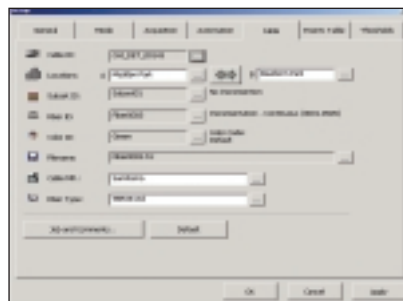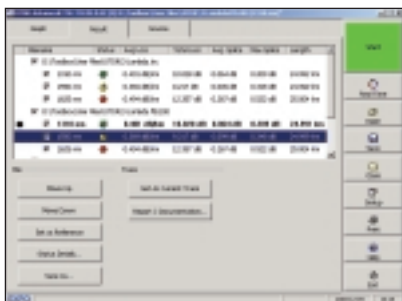

Auto and Advanced Modes: Choose Your Testing Approach

FTB-7000B/FTB-7000D/FTB-70000C

Each FTB-7000B, FTB-7000D and FTB-70000C module comes with exclusive EXFO ToolBox OTDR software. Streamline data acquisition in the field and report generation back at the office with this powerful program. Choose from two testing approaches: Auto mode or Advanced mode.

Auto Mode: One-Touch Testing

Ideal for basic, repetitive applications, the Auto mode shortens the learning curve for new OTDR users.

- Preset test parameters
- Choice of single- or dual-wavelength OTDR testing
- Convenient one-step event table

As easy as 1-2-3!

Press the Start button for automatic single- up to triple-wavelength testing to compile complete OTDR test results.

Quick Save with automated trace-naming completes the test routine.

Quick Print produces a detailed test report.

Advanced Mode: Flexibility for Experts

For complete control over your test routine, select the Advanced mode. Manually set all acquisition parameters, including the index of refraction (IOR) and helix factor. Save time and get better results by fine-tuning acquisition parameters on the fly.

Fast-Track Your Cable Reports

Accelerate OTDR data post-processing with specialized ToolBox software. For high-fiber-count projects, two key ToolBox 6 utilities—the batch processor and cable report generator—can cut OTDR post-processing time by up to 90 %. Install ToolBox software on your office PC for convenient data post-processing.


Create complete cable reports easily. Replace hundreds of single-fiber test printouts with a single report, facilitating and speeding up data management on high-fiber-count projects. Get statistics automatically, per event and per fiber. Generate average and maximum values for all the fibers of a cable or for a test session. Print reports with end-to-end or bidirectional OTDR data based on single or multiple wavelengths and include results on event reflectance, ORL and macrobends with this powerful utility.

User-Centric Print Options

— Cable Report Function

Create cable acceptance reports and get down to specifics with:

1. **Fiber Event Report**
Complete event data in a compact format
2. **Fiber Section Report**
Get a close-up look at any fiber section
3. **Fault Report**
Faults feedback based on specified user-thresholds.

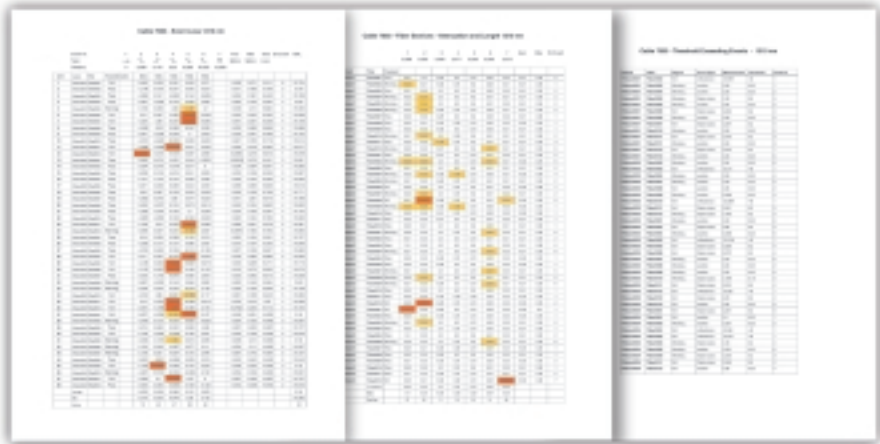

Fiber Event Report

Fiber Section Report

Fault Report

— Batch Print Function

Choose from three print modes: Normal (full-size, multi-page OTDR report), Compressed (one-page report), or Multi-Trace (4, 6 or 8 traces per page). Plus, add report statistics such as event tables.



Normal

Compressed

Multi-Trace

— Quick-Print Function

Print the on-screen OTDR trace and choose statistics.

SPECIFICATIONS

Multimode OTDR Module Specifications¹

Family/Model	Wavelength (nm)	Dynamic range ² at 100 ns/1 μ s (dB)	Event dead zone ³ (m)	Attenuation dead zone ³ (m)
FTB-72XXB-C ⁴	850 \pm 20/1300 \pm 20	23/27	1.5/1.5	5/5
FTB-72XXB-D ⁴	850 \pm 20/1300 \pm 20	25/29	1.5/1.5	5/5

Singlemode OTDR Module Specifications¹

Model	Wavelength (nm)	Dynamic range at 10 μ s ² (dB)	Dynamic range at 20 μ s ² (dB)	Event dead zone ⁵ (m)	Attenuation dead zone ⁵ (m)
FTB-7200D-XXX	1310 \pm 20/1550 \pm 20	35/34	36/35	1/1	5/6 (4/4) ⁶
FTB-7300D-XXX	1310 \pm 20/1490 \pm 10/1550 \pm 20/1625 \pm 10	38/34/37/35	39/35/38/36	1/1/1/1	5/6/6/6 (4/4/4/5) ⁶
FTB-74XXB-B	1310 \pm 20/1410 \pm 10/1550 \pm 20/1625 \pm 10	40/37/40 ¹⁰ /38	41.5/38.5/40.5 ¹⁰ /39	3/3/3/3	10/10/15/16
FTB-74234C	1310 \pm 20/1550 \pm 20/1625 \pm 10	41/40/38	42.5/41.5/39.5	3/3/3	8/10/10
FTB-75XXB-B ⁷	1310 \pm 20/1550 \pm 20/1625 \pm 10	43.5/43.5 ¹¹ /41.5	45/45 ¹¹ /43	3/3/3	10/15/16
FTB-7503B-B-ER ⁷	1550 \pm 20	44	45.5	3	15

For complete details on all available configurations, refer to the Ordering Information section.

General Specifications

	7200B-C/7200B-D series	7200D/7300D series	7400B-B/ 7500B-B/74234C-B series
Distance range (km)	0.625, 1.25, 2.5, 5, 10, 20, 40	1.25, 2.5, 5, 10, 20, 40, 80, 160, 260	1.25, 2.5, 5, 10, 20, 40, 80, 160, 260
Pulse width (ns)	10, 30, 100 (850 nm) 10, 30, 100, 275, 1000 (1300 nm)	5, 10, 30, 100, 275, 1000, 2500, 10 000, 20 000	10, 30, 100, 275, 1000, 2500, 10 000, 20 000
Linearity (dB/dB)	\pm 0.05	\pm 0.03	\pm 0.05
Loss threshold (dB)	0.01	0.01	0.01
Loss resolution (dB)	0.001	0.001	0.001
Sampling resolution (m)	0.08 to 5	0.04 to 5	0.08 to 5
Sampling points	Up to 16 000	Up to 128 000	Up to 52 000
Distance uncertainty ⁸ (m)	\pm (1 + 0.0025 % x distance)	\pm (0.75 + 0.0025 % x distance)	\pm (1 + 0.0025 % x distance)
Measurement time	User-defined (60 min maximum)	User-defined (60 min maximum)	User-defined (60 min maximum)
Real-time refresh (s)	\leq 1	Guaranteed: \leq 0.4 Typical: \leq 0.3	\leq 1
Stable source output power ⁹ (dBm)	-7	-8 (7200D) -4.5 (7300D)	-5
Visual fault locator (optional)	Laser, 650 nm \pm 10 nm CW, Pout maximum: \leq 800 μ W	Laser, 650 nm \pm 10 nm CW, Pout maximum: \leq 5 mW	Laser, 650 nm \pm 10 nm CW, Pout maximum: \leq 800 μ W

Notes

- All specifications valid at 23 °C \pm 2 °C (73.4 °F \pm 3.6 °F) with an FC/PC connector, unless otherwise specified.
- Typical dynamic range with a three-minute averaging at SNR = 1 (for 7200D and 7300D, typical dynamic range with 45-second averaging is only 1 dB lower than values given for three-minute averaging).
- Typical dead zone of multimode modules for reflectance below -35 dB, using a 10 ns pulse.
- ORL measurement not available for this module.
- Typical dead zone of singlemode modules for reflectance below -45 dB, using a 10 ns pulse (5 ns pulse for 7200D and 7300D).
- Typical dead zone of 7200D and 7300D singlemode modules for reflectance below -55 dB, using a 5 ns pulse.
- Typical dynamic range on NZDS fiber with a three-minute average at SNR = 1.
- Does not include uncertainty due to fiber index and sampling resolution.
- Typical output power value at 1550 nm.
- Typical dynamic range at 1550 nm for the FTB-7423B-B configuration is 2 dB lower at 10 μ s and 1 dB lower at 20 μ s.
- Typical dynamic range at 1550 nm for the FTB-7503B-B and FTB-7523B-B configuration is 2 dB lower.

Safety



LASER SAFETY

21 CFR 1040.10 AND
IEC 60825-1:1993+A2:2001

CLASS 1M WITHOUT VFL OPTION
CLASS 3R WITH VFL OPTION

ORDERING INFORMATION

Multimode

FTB-72XXB-X-XX-XX

Model

Single-Wavelength

FTB-7201B = MM OTDR module, 850 nm

FTB-7202B = MM OTDR module, 1300 nm

Dual-Wavelength

FTB-7212B = MM OTDR module, 850/1300 nm

Example: FTB-7212B-C-EI-EUI-89-VFL

Fiber Type

C = 50/125 μ mD = 62.5/125 μ m

Connector

EI-EUI-28 = UPC/DIN 47256

EI-EUI-76 = UPC/HMS-10/AG

EI-EUI-89 = UPC/FC narrow key

EI-EUI-90 = UPC/ST

EI-EUI-91 = UPC/SC

EI-EUI-95 = UPC/E-2000

Visual Fault Locator

00 = Without visual fault locator

VFL = With visual fault locator
(Universal 2.5 mm connector)

Singlemode (Short- and Medium-Haul)

FTB-7X00D-XX-XX-XX

Model

Single-Wavelength

FTB-7200D-002B = SM short-haul OTDR module, 1310 nm (9/125 μ m)FTB-7200D-003B = SM short-haul OTDR module, 1550 nm (9/125 μ m)FTB-7300D-002B = SM medium-haul OTDR module, 1310 nm (9/125 μ m)FTB-7300D-003B = SM medium-haul OTDR module, 1550 nm (9/125 μ m)FTB-7300D-004B = SM medium-haul OTDR module, 1625 nm (9/125 μ m)

Dual-Wavelength

FTB-7200D-023B = SM short-haul OTDR module, 1310/1550 nm (9/125 μ m)FTB-7300D-023B = SM medium-haul OTDR module, 1310/1550 nm (9/125 μ m)FTB-7300D-034B = SM medium-haul OTDR module, 1550/1625 nm (9/125 μ m)

Triple-Wavelength

FTB-7300D-234B = SM medium-haul OTDR module, 1310/1550/1625 nm (9/125 μ m)FTB-7300D-236B = SM medium-haul OTDR module, 1310/1490/1550 nm (9/125 μ m)

Example: FTB-7300D-234B-EI-EUI-89-VFL

Connector

EA-EUI-28 = APC/DIN 47256

EA-EUI-89 = APC/FC narrow key

EA-EUI-91 = APC/SC

EA-EUI-95 = APC/E-2000

EI-EUI-28 = UPC/DIN 47256

EI-EUI-76 = UPC/HMS-10/AG

EI-EUI-89 = UPC/FC narrow key

EI-EUI-90 = UPC/ST

EI-EUI-91 = UPC/SC

EI-EUI-95 = UPC/E-2000

Visual Fault Locator

00 = Without visual fault locator

VFL = With visual fault locator
(Universal 2.5 mm connector)

Singlemode (Long- and Ultra-Long-Haul)

FTB-7XXX-B-XX-XX

Model

Single-Wavelength

FTB-7402B-B = SM long-haul OTDR module, 1310 nm (9/125 μ m)FTB-7403B-B = SM long-haul OTDR module, 1550 nm (9/125 μ m)FTB-7404B-B = SM long-haul OTDR module, 1625 nm (9/125 μ m)FTB-7405B-B = SM long-haul OTDR module, 1410 nm (9/125 μ m)FTB-7503B-B-ER = SM ultra-long-haul OTDR module, 1550 nm (9/125 μ m)FTB-7503B-B = SM ultra-long-haul OTDR module, 1550 nm (9/125 μ m)FTB-7504B-B = SM ultra-long-haul OTDR module, 1625 nm (9/125 μ m)

Dual-Wavelength

FTB-7423B-B = SM long-haul OTDR module, 1310/1550 nm (9/125 μ m)FTB-7434B-B = SM long-haul OTDR module, 1550/1625 nm (9/125 μ m)FTB-7523B-B = SM ultra-long-haul OTDR module, 1310/1550 nm (9/125 μ m)FTB-7534B-B = SM ultra-long-haul OTDR module, 1550/1625 nm (9/125 μ m)

Example: FTB-7534B-B-EI-EUI-89-VFL

Connector

EA-EUI-28 = APC/DIN 47256

EA-EUI-89 = APC/FC narrow key

EA-EUI-91 = APC/SC

EA-EUI-95 = APC/E-2000

EI-EUI-28 = UPC/DIN 47256

EI-EUI-76 = UPC/HMS-10/AG

EI-EUI-89 = UPC/FC narrow key

EI-EUI-90 = UPC/ST

EI-EUI-91 = UPC/SC

EI-EUI-95 = UPC/E-2000

Visual Fault Locator

00 = Without visual fault locator

VFL = With visual fault locator
(Universal 2.5 mm connector)

Singlemode (Triple-Wavelength)

FTB-74XXC-B-XX-XX

Model

Triple-Wavelength

FTB-74234C-B = SM ultra-long-haul OTDR module,
1310/1550/1625 nm (9/125 μ m)

Example: FTB-74234C-B-EI-EUI-89-VFL

Connector

EA-EUI-28 = APC/DIN 47256

EA-EUI-89 = APC/FC narrow key

EA-EUI-91 = APC/SC

EA-EUI-95 = APC/E-2000

EI-EUI-28 = UPC/DIN 47256

EI-EUI-76 = UPC/HMS-10/AG

EI-EUI-89 = UPC/FC narrow key

EI-EUI-90 = UPC/ST

EI-EUI-91 = UPC/SC

EI-EUI-95 = UPC/E-2000

Visual Fault Locator

00 = Without visual fault locator

VFL = With visual fault locator
(Universal 2.5 mm connector)Find out more about EXFO's extensive line of high-performance portable instruments by visiting our website at www.exfo.com.Corporate Headquarters > 400 Godin Avenue, Vanier (Quebec) G1M 2K2 CANADA | Tel.: 1 418 683-0211 | Fax: 1 418 683-2170 | info@exfo.comToll-free: 1 800 663-3936 (USA and Canada) | www.exfo.com

EXFO America	4275 Kellway Circle, Suite 122	Addison, TX 75001 USA	Tel.: 1 800 663-3936	Fax: 1 972 836-0164
EXFO Europe	Le Dynasteur, 10/12 rue Andras Beck	92366 Meudon la Forêt Cedex FRANCE	Tel.: +33.1.40.83.85.85	Fax: +33.1.40.83.04.42
EXFO Asia-Pacific	151 Chin Swee Road, #03-29 Manhattan House	SINGAPORE 169876	Tel.: +65 6333 8241	Fax: +65 6333 8242
EXFO China	Beijing New Century Hotel Office Tower, Room 1754-1755	Beijing 100044 P. R. CHINA	Tel.: +86 (10) 6849 2738	Fax: +86 (10) 6849 2662
	No. 6 Southern Capital Gym Road			

EXFO is certified ISO 9001 and attests to the quality of these products. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. EXFO has made every effort to ensure that the information contained in this specification sheet is accurate. However, we accept no responsibility for any errors or omissions, and we reserve the right to modify design, characteristics and products at any time without obligation. Units of measurement in this document conform to SI standards and practices.

Contact EXFO for prices and availability or to obtain the phone number of your local EXFO distributor.

For the most recent version of this spec sheet, please go to the EXFO website at <http://www.exfo.com/specs>

In case of discrepancy, the Web version takes precedence over any printed literature.