

TECHNICAL DATA

# TiX1000, TiX660, TiX640 and TiX620 Infrared Cameras

## The Fluke Expert Series



### PREMIUM IMAGE QUALITY

#### SPATIAL RESOLUTION

**TiX1000**

0.6 mRad

**TiX660 and TiX640**

0.8 mRad

**TiX620**

0.85 mRad

#### RESOLUTION

**TiX1000**

1024 x 768 (786,432 pixels)

**TiX660, TiX640 and TiX620**

640 x 480 (307,200 pixels)

#### SUPER RESOLUTION MODE

**TiX1000**

2048 x 1536 (3,145,728 pixels)

**TiX660, TiX640 and TiX620**

1280 x 960 (1,228,800 pixels)

#### FIELD OF VIEW

**TiX1000**

32.4 ° x 24.7° (1.0/30 mm)

**TiX660 and TiX640**

30.9 ° x 23.1° (1.0/30 mm)

**TiX620**

32.7° x 24.0° (1.0/20 mm)

#### TEMPERATURE RANGE

**TiX1000 and TiX660**

-40 to 2000 °C (-40 to 3632 °F)

**TiX640**

-40 to 1200 °C (-40 to 2192 °F)

**TiX620**

-40 to 600 °C (-40 to 1112 °F)

### Fluke Infrared Cameras

**Take the guesswork out of your inspection and analysis.**

- **10 times the on-camera pixels** than standard 320 x 240 cameras (1024 x 768 resolution, 786,432 pixels)
- **Work from safer distances**—inspect areas that you could not get close to before and still get spectacular, detailed infrared images
- **Get a premium in-field viewing experience** for quick issue identification with the large 5.6 inch high resolution LCD screen
- **Enhanced image quality and temperature measurement accuracy**—get 4 times the resolution and pixels than standard mode with SuperResolution (up to 3,145,728 pixels)
- **Save time focusing** with the most advanced focus options available for consistently in focus image: LaserSharp® Auto Focus, auto focus, manual and EverSharp multifocal recording features—available on one camera
- **The Fluke Expert Series offers the best flexibility of the entire Fluke infrared camera portfolio** to capture spectacular images close up or from a distance with up to eight lens options (2x and 4x telephoto lenses, two wide angle lenses, three macro lenses and one standard lens) so great images can be captured despite certain obstacles



Electrical utility distribution lines

\*HD images are captured by the TiX1000 in SuperResolution mode and viewable in the SmartView® software.

## Detailed specifications

	TiX1000	TiX660	TiX640	TiX620
<b>Key features</b>				
IFOV with standard lens (spatial resolution)	0.6 mRad	0.8 mRad		0.85 mRad
Detector resolution	1024 x 768 (786,432 pixels)	640 x 480 (307,200 pixels)		
Field of View (FOV) w/standard 30mm lens	32.4° x 24.7°	30.9° x 23.1°		32.7° x 24.0°
SuperResolution and Dynamic SuperResolution (resolution enhancement)	Yes, MicroScan technology quadruples IR measurement pixels			
Subwindowing modes available (add on at time of order)	Option 1: 640 x 480 (60 fps) Option 2: 384 x 288 (120 fps) Option 3: 1024 x 96 (240 fps)	Option 1: 384 x 288 (120 fps) Option 2: 640 x 120 (240 fps)		384 x 288 (60 fps)
LaserSharp® Auto Focus	Yes			No
Laser distance meter	Yes, Accuracy: ± 1.5 mm, Range: 70 m (76.5 ft.), Wavelength: 635 nm (red), Laser class: 2			
Auto focus	Yes			
Advanced manual focus	Yes			
EverSharp multifocal recording	Yes, Multifocal recording captures images from different focal distances and combines them into one image displaying each object sharply for the best image quality			
Spectral range	7.5 µm to 14 µm			
Video recording/video streaming	Non-radiometric infrared video recording (to SD card); Visual and infrared video streaming (radiometric and non-radiometric) with optional Ethernet converter cable			
Display	Extra-large 5.6 in color TFT display, 1280 x 800 pixel resolution, suitable for daylight operation			
<b>IR-Fusion® technology</b>				
AutoBlend™ mode	Yes			
Viewing options available	Picture-in-picture, continuous blending, color alarms (above and below user defined temperatures)			
Thermal sensitivity [NETD]	≤ 0.05 °C at 30 °C target temp (50 mK)	≤ 0.03 °C at 30 °C target temp (30 mK)		≤ 0.04 °C at 30 °C target temp (40 mK)
Filter mode	Yes			
Level and span	Smooth auto and manual scaling			
Minimum span (in manual mode)	2.5 °C (4.5 °F)			
Minimum span (in auto mode)	4.0 °C (7.2 °F)			
Built-in digital camera (visible light)	Yes, up to 8 Megapixel resolution for image and video recording			
Frame rate	30 Hz or 9 Hz versions	60 Hz or 9 Hz versions		30 Hz
Laser pointer	Yes, class 2			
LED light (torch)	Yes			
Digital zoom	Up to 32x			
Geo-localization	Yes			
<b>Data storage and image capture</b>				
Extensive memory options	Removable micro SD memory card			
Image capture, review, save mechanism	One-handed image capture, review, and save capability			
Post-capture image editing (on camera)	Yes. Conduct on-camera analysis for in-field results			
Advanced text annotation	Yes. Including standard shortcuts as well as user programmable options			
File formats	.irb, .jpg, .wav, .avi			
Memory review	Thumbnail view navigation and review selection			
Software	SmartView® software, included			
Export file formats with SmartView® software	BMP, DIB, GIF, JPE, JFIF, JPEG, JPG, PNG, TIF and TIFF			
Voice annotation	Yes			
Audio	Integrated microphone and loudspeaker for voice annotations			
IR-PhotoNotes™	Yes			No
Text annotation	Yes			

## Detailed specifications

	TiX1000	TiX660	TiX640	TiX620
Video recording/video streaming	Yes			
Image/video storage	SD HC memory card			
Interfaces for image/data transfer	Supported in camera data ports: SD card, GigE vision, RS-232, USB 2.0, DVI-D and composite video Supported in SmartView® software: SD card			
<b>Battery</b>				
Batteries (field replaceable, rechargeable)	Two standard lithium ion video camera batteries with LED charge level indicator		One standard lithium ion video camera battery with charge level indicator	
Battery charging system	External: 12 V dc to 24 V dc			
AC operation	Yes			
<b>Temperature measurement</b>				
Temperature measurement range	-40 °C to +1200 °C (-40 °F to 2192 °F) High temperature option: up to 2000 °C (3632 °F)		-40 °C to +1200 °C (-40 °F to 2192 °F)	-40 to 600 °C (-40 to 1112 °F)
Accuracy	± 1.5 K or ± 1.5 % (±1 K when target measures 0 °C to 100 °C)			± 2 K or ± 2 %
On screen emissivity correction	Yes			
On-screen reflected background temperature compensation	Yes			
Correction functions	LDC™ - Laser rangefinder based distance correction, emissivity (manual or material table)		Emissivity (manual or material table)	
	Transmissivity   Ambient temperature   Humidity (option)			
<b>Color palettes</b>				
Standard palettes	Rainbow, grayscale, ironbow, blue-red, marked, high contrast, steps, black rd, hot metal, menthol, sepia, grayscale/rainbow			
<b>General specifications</b>				
Color alarms	High-temperature and low-temperature			
Operating temperature	-25 °C to +55 °C (13 °F to 131 °F)			
Storage temperature	-40 °C to +70 °C (-40 °F to 158 °F)			
Relative humidity	10 % to 95 %, non-condensing			
Center-point temperature measurement	Yes			
Measurement functions (selection)	Multiple measurement spots, Hot/cold spot detection, Isotherms, Profiles, Differences (subtraction)			
Center box	Yes. Adjustable shapes (region of interest) for advanced analysis (min, max and avg)			
Vibration	Operational: 2G, IEC 68-2-6			
Shock	Operational: 25G, IEC 68-2-29			
Size (H x W x L)	210 mm × 125 mm × 155 mm (8.25 in x 4.9 in x 6.1 in)		206mm x 125mm x 139mm(8.1 in x 4.9 in x 5.5 in)	
Weight	1.95 kg (4.3 lb)		1.4 kg (3.2 lb)	
Viewfinder	Tilttable LCoS color viewfinder display, 800 × 600 pixel resolution		None	
Ergonomics	Camcorder w/handle		Camcorder	
Enclosure rating	IP54			
Warranty	Two-years			
Recommended calibration cycle	Two-years (assumes normal operation and normal aging)			
Supported languages	Czech, Dutch, English, Finnish, French, German, Hungarian, Italian, Japanese, Korean, Polish, Portuguese, Russian, Simplified Chinese, Spanish, Swedish, Traditional Chinese and Turkish.			

## TiX1000, TiX660 and TiX640 compatible lenses

Available optional lenses* with IP54-proof bayonet mount				1024 x 768		640 x 480	
Fluke Model	Lens description	Focal distance (mm)	Focus (m)	iFOV (mRad)	FOV (°)	iFOV (mRad)	FOV (°)
<b>FLK-Xlens/SupWide</b>	Super wide-angle lens	7.5	0.17	2.3	135.8 x 101.4	3.3	128.9 x 92.7
<b>FLK-Xlens/Wide</b>	Wide-angle lens	15	0.47	1.1	67.8 x 50.7	1.7	62.3 x 46.4
<b>FLK-Xlens/Stan</b>	Normal lens	30	0.72	0.6	32.4 x 24.7	0.8	30.9 x 23.1
<b>FLK-Xlens/Tele</b>	Telephoto lens	60	1.99	0.3	16.4 x 12.4	0.4	14.9 x 11.3
<b>FLK-Xlens/SupTele</b>	Super telephoto lens	120	6.58	0.1	8.1 x 6.2	0.2	7.5 x 5.7

Available optional lenses* with IP54-proof bayonet mount				1024 x 768		640 x 480	
Fluke Model	Lens description	Focal distance (mm)	Focus (mm)	iFOV (mRad)	Resolution (µm)	iFOV (mRad)	FOV (°)
<b>FLK-Xlens/Macro1</b>	Close-up 0.2x	For 30	137.4	85.5 x 63.2	81	78.1 x 57.9	119
<b>FLK-Xlens/Macro2</b>	Close-up 0.5x	For 30	47.4	34.3 x 25.3	32	31.3 x 23.2	47
<b>FLK-Xlens/Macro3**</b>	Close up 0.5x	For 60	100	35.1 x 26.5	35	32.3 x 24.4	50



## TiX620 compatible lenses

Type	f / Focal length	Field of view HFOV x VFOV	iFOV, paraxial	Minimum focus distance (radiometric AF, from lens surface)
<b>Wide angle</b>	1.0 / 10 mm	57.1° x 44.4°	1.70 mrad	250 mm
<b>Standard</b>	1.0 / 30 mm	32.7° x 24.0°	0.85 mrad	500 mm
<b>Telephoto</b>	1.0 / 40 mm	15.5° x 11.6°	0.43 mrad	1,300 mm


\*Optional lenses must be calibrated to the individual camera. If lens purchase is post camera purchase, the camera will need to be returned for calibration with the lens.  
 \*\*Macro3 lens must be used with the Telephoto lens (FLK-Xlens-Tele).

## Ordering information


FLK-TiX1000 30Hz Thermal Imager; 1024 x 768; 30 Hz  
 FLK-TiX1000 9Hz Thermal Imager; 1024 x 768; 9 Hz  
 FLK-TiX660 60Hz Thermal Imager; 640 x 480; 60 Hz  
 FLK-TiX660 9Hz Thermal Imager; 640 x 480; 9 Hz  
 FLK-TiX640 60Hz Thermal Imager; 640 x 480; 60 Hz  
 FLK-TiX640 9Hz Thermal Imager; 640 x 480; 9 Hz  
 FLK-TiX620 30Hz Thermal Imager; 640 x 480; 30 Hz

### Included with product

These infrared cameras are shipped with a rechargeable battery (2 for TiX1000/TiX660; 1 for TiX640/620), battery charger and adapter, AC adapter, SD card reader, protective lens cap, hand strap, neck strap, carrying case, warranty card, safety instructions, calibration certificate, CD includes product manuals in English, Chinese, German, Portuguese, Spanish, French, Italian, Korean, Japanese, Russian and Turkish (printed in English and Chinese) and SmartView® software. (Software is also available via download at [www.fluke.com/smartviewdownload](http://www.fluke.com/smartviewdownload)).

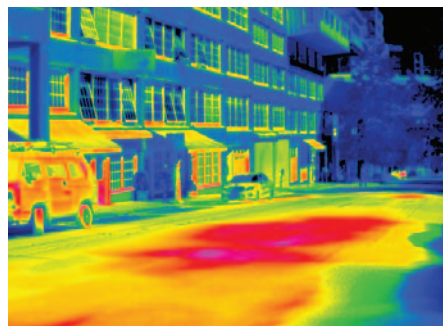

Steam vents under city street

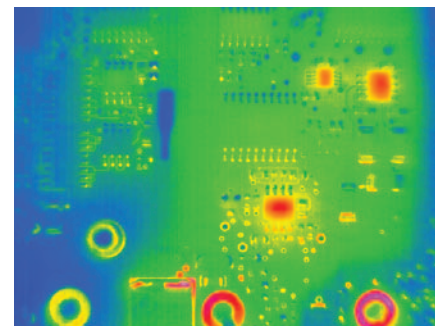

Printed circuit board assembly inspection

**Fluke.** Keeping your world up and running.®

**Fluke Corporation**  
 PO Box 9090, Everett, WA 98206 U.S.A.  
**Fluke Europe B.V.**  
 PO Box 1186, 5602 BD Eindhoven, The Netherlands

Modification of this document is not permitted without written permission from Fluke Corporation.

**For more information call:**  
 In the U.S.A. (800) 443-5853 or Fax (425) 446-5116  
 In Europe/M-East/Africa +31 (0)40 267 5100 or Fax +31 (0)40 267 5222  
 In Canada (800)-36-FLUKE or Fax (905) 890-6866  
 From other countries +1 (425) 446-5500 or Fax +1 (425) 446-5116  
 Web access: <http://www.fluke.com>

©2015, 2016 Fluke Corporation. Specifications subject to change without notice. 9/2016 6003153j-en