

## JDSU HD3 Specs

Provided by [www.AAATesters.com](http://www.AAATesters.com)

### HP3 Series

Fiber Inspection and Test System with Compact Video Display



HP3-\*\*-P4 Fiber Inspect and Test System with Integrated Power Meter and Patch Cord Microscope

#### Key Features

- Inspects both sides of fiber interconnect, and accurately tests and measures optical power with one device
- Integrated functions and features eliminate switching between multiple devices
- Input for FBP series probe microscope and a dedicated patch cord microscope (PCM) let users quickly and easily inspect both sides fiber interconnects
- Integrated PCM eliminates need for changing inspection tips, prevents misrouting, and protects patch cords
- Compact TFT LCD to view clear, crisp, detailed images of fiber end faces with optimal resolution
- Auto-shutoff after 5 minutes of inactivity or permanent ON capability
- Integrated power meter (OLP-6/OLP-8) for all single-mode and multimode applications, such as LAN, telecom, CATV, and DWDM testing
- Modulation frequency detection lets users identify individual fibers at specific tones
- Three-year calibration period
- Automatic wavelength detection (with JDSU optical light source)

#### Applications

- Inspect fiber end faces and accurately test and measure optical power with one device
- Easily inspect both the bulkhead (with probe) and patch cord (with PCM) sides of fiber interconnects
- Measure optical power and attenuation (with JDSU optical light source)
- Measure optical power with multiple pre-calibrated wavelengths:
  - 850, 980, 1300, 1310, 1490, 1550, and 1625 nm
- Dedicated for all single-mode and multimode applications, such as LAN, telecom, CATV, and DWDM testing
- Use with JDSU light source to detect modulation frequency and identify individual fibers

#### HP3 Series Fiber Inspect and Test System

The JDSU HP3-60-P4 and HP3-80-P4 (with integrated patch cord microscope) inspection and test systems combine fiber inspection and optical power measurement into a single seamless handheld device. The result is a significant increase in workflow efficiency and a decrease in total inspection and test time.




The HP3-\*\*-P4 system, derived from the popular HD3 series, provides high-quality image resolution in a compact, portable design. The integrated power meter offers quick, easy, and convenient field measurement of optical power and attenuation. Easy push-button operation makes the device simple and straightforward, while the inspect-test process establishes optimal workflow practices.



Inspect the Patch Cord with Integrated PCM and the Bulkhead with Probe

### Benefits of the Integrated PCM

- Lets users quickly and easily inspect both sides of the fiber interconnect
- Reduces inspection time by more than 50 percent
- Inspects bulkhead with probe microscope and patch cord with PCM
- Eliminates changing inspection tips on the probe to inspect patch cord side
- Prevents misplaced and mishandled inspection tips
- Prevents misrouting by inspecting one interconnect at a time
- Protects *male* (patch cord) ends from contamination by *parking* it in the patch cord module
- A complete selection of FMAE adapters for every application and connector

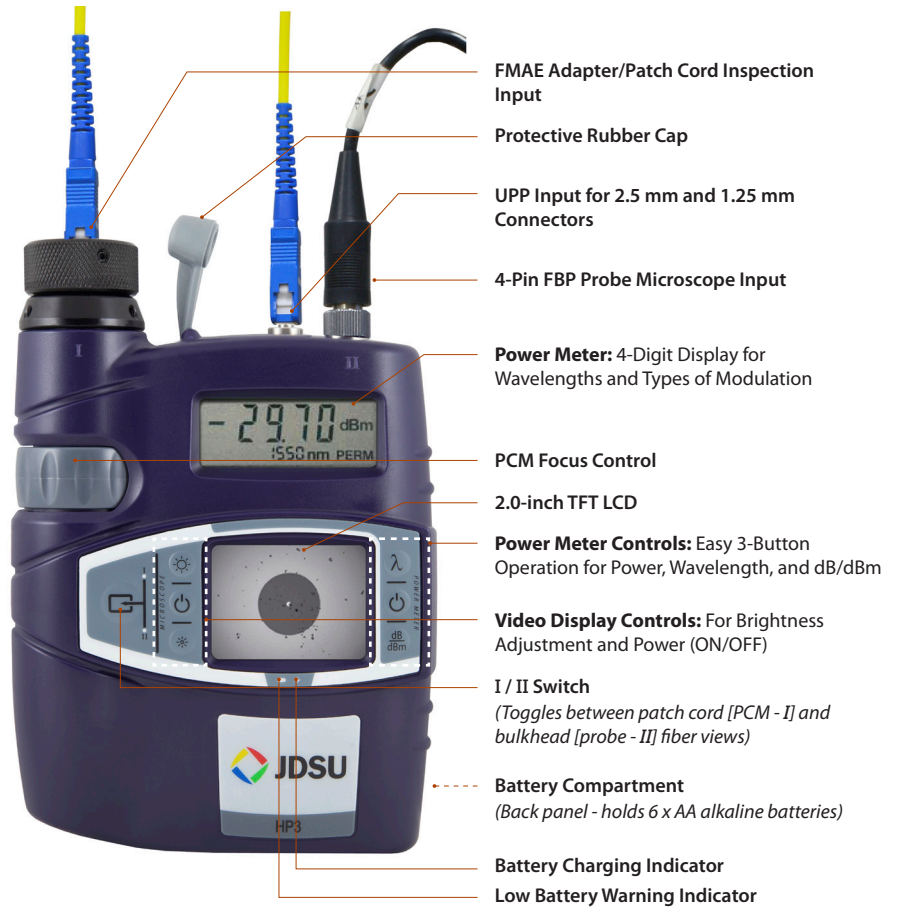

### Integrated Patch Cord Microscope (PCM)

The HP3-\*\*-P4 features an integrated patch cord microscope, adding further value with improved workflow efficiency. Enabling the user to quickly and easily inspect both the *female* (bulkhead) and *male* (patch cord) sides of a fiber interconnect and measure optical power levels makes the HP3-\*\*-P4 the ultimate system for fiber technicians.

JDSU offers a wide selection of precision FMAE adapters optimized for easy and accurate inspection of various connector types and applications. To inspect the patch cord, simply insert the connector into the FMAE adapter and focus the image on the display.

3



HP3-60/80  
(without patch cord microscope)

**Comparison (Display Types)**

JDSU Fiber Display Types (with Probe Microscope)	HD3	HD3-P	HP3-**	HP3-**-P4
• Inspect patch cords (w/Probe microscope)	●	●	●	●
• Inspect bulkheads (w/Probe microscope)	●	●	●	●
• Inspect <i>both sides</i> quickly and easily (w/Probe+PCM)		●		●
• Test/measure optical power and attenuation			●	●

**Integrated Power Meter**

**Basic and Reliable**

The power meter is used for simple optical power testing, or with a light source for insertion loss measurements at various wavelengths.

**Accurate Measurement and Simple Operation**

Three-button operation and a bright, clear display make the power meter very easy to use. When combined with a JDSU light source, the possibility of measurement errors is eliminated because the power meter automatically detects the wavelength being transmitted. As a result, dual wavelength measurements at 850 and 1300 nm or 1310 and 1550 nm can be made quickly and easily using the saved reference levels.

**Automatic Identification of Individual Fibers**

The power meter can be used with a JDSU light source to detect the modulation frequency of the light coupled into the fiber, for identification purposes.

**Universal Push-Pull Interface**

Interchangeable UPP adapters let you connect and test any fiber connector.



**Efficient Inspection and Test Workflow**

**1**  
INSPECT PATCH CORD (I)




**2**  
ACTIVATE PROBE (II)



**3**  
INSPECT BULKHEAD



**4**  
CONNECT



**5**  
TEST



### HP3-\*\*-P4 Power Meter

**Display range:**

- » **HP3-60-P4** -65 to +10 dBm
- » **HP3-80-P4** -50 to +23 dBm

**Max. permitted input level**

- » **HP3-60-P4** +10 dBm
- » **HP3-80-P4** +23 dBm

**Standard wavelength settings** 850, 980, 1300, 1310, 1490, 1550, 1625 nm

**Intrinsic uncertainty<sup>1</sup>** ±0.20 dB (±5%)

**Linearity<sup>1</sup>** ±0.06 dB (-50 to +5 dBm)

**Wavelength range** 780 to 1650 nm

**Wavelength and modulation** 270 Hz, 330 Hz, 1 kHz, 2 kHz

- » **HP3-60-P4**  
1300, 1310, 1490, 1550, 1625 nm -50 to +10 dBm
- 850, 980 nm -45 to +10 dBm

- » **HP3-80-P4**  
1300, 1310, 1490, 1550, 1625 nm -35 to +23 dBm
- 850, 980 nm -30 to +23 dBm

**Run time** ~180 hours (continuous on)

**Auto-shutoff time** 5 minutes

**Optical interface** UPP 2.5 mm adapter (*DIN, ST, FC, SC, E2000*)  
UPP 1.25 mm adapter (*LC, MU*)  
*- sold separately*

**Display** LCD, 4-digit

**Result display in** dBm, dB

**Resolution** 0.01 dB

<sup>1</sup> Under the following reference conditions: -20 dBm (CW), 1300 nm ±1 nm, 23°C ±3K, 45 to 75% relative humidity, 9 to 50 µm fiber

### HP3-\*\*-P4 Specifications

<b>Dimensions</b>	162 x 114 x 42 mm (6.4 x 4.5 x 1.7 in)
<b>Weight</b>	352 g (12.4 oz) with six AA alkaline batteries
<b>Video display</b>	50.8 mm (2.0-in) TFT LCD
<b>Connector</b>	4-pin Hirose™ input for FBP probes
<b>Power source</b>	AC power adapter (100–240 VAC/12V DC); 6 AA batteries or rechargeable battery pack
<b>Power mode</b>	ON (continuous on); OFF
<b>Run time</b>	~5.5 hours (continuous on)
<b>Auto-shutoff time</b>	Auto-shutoff after 5 minutes of inactivity
<b>Horizontal field-of-view (FOV)</b>	550 µm @ 200X 350 µm @ 400X
<b>Warranty</b>	1 yr

Hirose is a trademark of Hirose Electronic Corporation.

### Ordering Information

<b>FIT-HP3-60-P4</b>	Handheld display with integrated power meter and 400X patch cord microscope (PCM)
<b>FIT-HP3-80-P4</b>	Handheld display with integrated high-power optical power meter and 400X PCM
<b>FIT-S105</b>	<b>Inspection and Test Kit:</b> Dual-mag (200/400X) FBP probe microscope and tips, HP3-60-P4 inspect and test system with 400X PCM, carrying case
<b>FIT-S115</b>	<b>Inspection and Test Kit:</b> Dual-mag (200/400X) FBP probe microscope and tips, HP3-80-P4 inspect and test system with 400X PCM, carrying case
<b>FIT-S105-C</b>	<b>Inspection, Cleaning and Test Kit:</b> Dual-mag (200/400X) FBP probe microscope and tips, HP3-60-P4 inspect and test system with 400X PCM, cleaning tools, carrying case
<b>FIT-S115-C</b>	<b>Inspection, Cleaning and Test Kit:</b> Dual-mag (200/400X) FBP probe microscope and tips, HP3-80-P4 inspect and test system with 400X PCM, cleaning tools, carrying case
<b>FIT-S105-PRO</b>	<b>Fiber Essentials Tool Kit:</b> Dual-mag (200/400X) FBP probe microscope and tips, HP3-60-P4 inspect and test system with 400X PCM, FFL-050 visual fault locator, cleaning tools, hands-free utility boot, carrying case
<b>FIT-S115-PRO</b>	<b>Fiber Essentials Tool Kit:</b> Dual-mag (200/400X) FBP probe microscope and tips, HP3-80-P4 inspect and test system with 400X PCM, FFL-050 visual fault locator, cleaning tools, hands-free utility boot, carrying case
<b>FITP-RBP1</b>	Rechargeable battery pack, for HP3

### Test & Measurement Regional Sales

<b>NORTH AMERICA</b> TOLL FREE: 1 866 228 3762 FAX: +1 301 353 9216	<b>LATIN AMERICA</b> TEL: +1 954 688 5660 FAX: +1 954 345 4668	<b>ASIA PACIFIC</b> TEL: +852 2892 0990 FAX: +852 2892 0770	<b>EMEA</b> TEL: +49 7121 86 2222 FAX: +49 7121 86 1222	<a href="http://www.jdsu.com/inspect">www.jdsu.com/inspect</a>
---	--	---	---	--