

**FiberScout®**

**Tektronix TFS 2020 Specs**  
 Provided by [www.AAATesters.com](http://www.AAATesters.com)


# Handheld Optical Fault Finder

H A N D H E L D O P T I C A L F A U L T F I N D E R

*Priced for widespread use in cable restoration environment.*

**FiberScout®**

- Simple Symbolic Display
  - Graphics
  - Event Descriptions
- Fast Restoration Capability
- Small, Lightweight, Easy to Handle
- Easy One-button Operation
- Low Cost – High Performance
- Long Range
- Universal Short Range
- Multimode Short Range
- Dual Port Capability
- High Distance Accuracy
- User-selectable Fault Thresholds
- Internal Battery Operation
- Internal Test Result Storage
- RS-232C Output Port: PC Interface, Seiko DPU-201G Printer, Seiko DPU-411 Printer
- PC Interface Software
- Rackmount Available

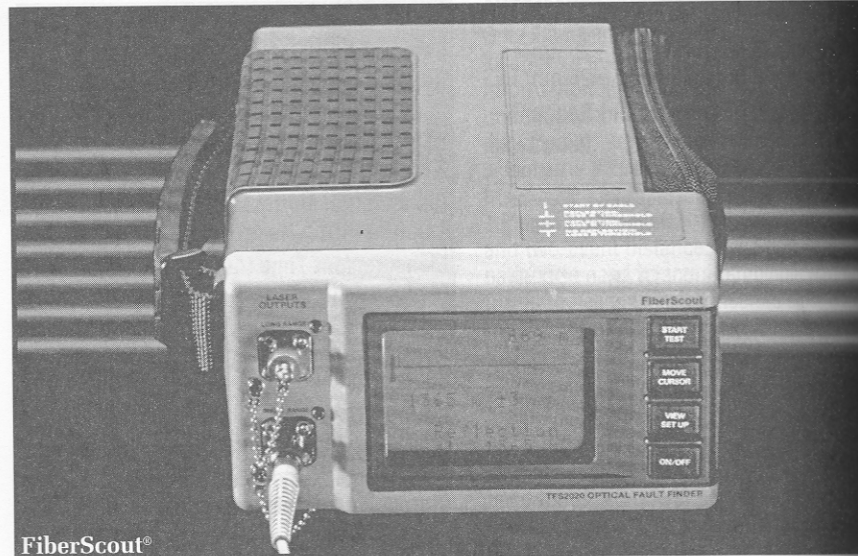

**FiberScout®**

Weighing just five pounds (2.3 kg), the battery-operated Tektronix TFS2020 FiberScout® reports the status of the fiber through four easy-to-understand symbols.

Designed to locate events and faults in optical cable, the FiberScout® is priced for widespread use in the cable restoration environment.

**CHARACTERISTICS**

**OPERATING PERFORMANCE\*1**

	Multimode Short Range	Universal Short Range	Long Range
Operating Distance Range*2	≥3.0 km @ 3.5 dB/km	≥3.0 km @ 2.5 dB/km	≥40.0 km @ 0.4 dB/km
Fault Detection Range (one way)	≥10.5 dB @ 62.5 μm		
Distance Measurement Accuracy*4			
To Reflective Event	±2 meters	±2 meters	±5 meters
To Non-reflective Event	±2 meters	±2 meters	±5 to 20 meters*4
Distance Readout Resolution	1 meter or 1 foot	1 meter or 1 foot	1 meter or 1 foot
Two Event Resolution*6			
Distance to Detect 2nd Reflection	≤10 meters	≤10 meters	≤40 meters
Loss Measurement Repeatability	±0.2 dB	NA	±0.3 dB
Loss Readout Resolution	±0.1 dB	NA	±0.1 dB
Fault Threshold Selections	1, 2, 3, or 4 dB	NA*7	1, 2, 3, or 4 dB
Optical Output Wavelength	835 nm ±35 nm	835 nm ±35 nm	1300 nm ±25 nm
Output Core Size	50 or 62.5 microns	8 to 10 microns	8 to 10 microns
Display	Backlit LCD, Graphics and Text		
Laser Safety	Complies with Class I, 21 CFR 1040.10/1040.11		
Power	Internal Rechargeable NiCad Battery Pack. Typical Operation life between charges: 6 hours. Typical shelf life between charges: 6 months. External AC/DC External Power/Charger Adapter.		

\*1 In some cases, varying test conditions may affect measurement performance.  
 \*2 With no events present.  
 \*3 At the 4 dB fault threshold setting.  
 \*4 Actual distance accuracy includes: timebase accuracy (±0.005%) quantization error in the Index of Refraction setting.  
 \*5 With extended averaging invoked.  
 \*6 The FiberScout® automatically uses the optimal pulse width to separate the loss measurements between two adjacent events.  
 \*7 For singlemode fiber, the FiberScout® will report any loss ≥1 dB. For multimode fiber, the FiberScout® will report any significant fault.

To order, contact your local sales office (listed on the inside back cover) or call the National Marketing Center at 1-800-833-9200.



# Handheld Optical Fault Finder

FiberScout®

1503C  
1503B

1502B

HANDHELD OPTICAL FAULT FINDER

No waveform interpretation is necessary – making the FiberScout® so simple to use, it allows fault finding by virtually any user, regardless of the person's level of training.

The FiberScout® gives you faster restoration capability and greater service staff effectiveness, since it can be deployed in far greater numbers than the more complex, more expensive OTDRs.

Documentation is fast and simple when using either of the lightweight, portable Seiko thermal printers. FiberScout® comes standard with non-volatile memory for internal storage of test results which can later be transferred to a PC.

For advanced documentation and storage needs, we also offer the FSTIP test interface package. Files are saved to the PC in ASCII form, which allows easy analysis of the representative trace and annotations of the results through virtually any word processor.

## ORDERING INFORMATION

**FiberScout®**  
Handheld Optical Fault Finder. Order TFS2020 ..... **\$25.00**  
**Includes:** Battery Pack (146-1000-01); 110 V AC/DC, Power Supply – USA/Canada (119-2731-00); Travel Case (016-1024-00); Accessory Pouch (016-0993-00); Operator Manual and Supplement (070-7167-04); Reference Label (062-9360-01).

With each FiberScout® ordered, select one of the option groups listed below:

**Opt. 01** – Equip with Long Range and Universal Short Range Ports ..... **+\$8,340**  
**Opt. 02** – Equip with Long Range Port ..... **+\$5,075**  
**Opt. 03** – Equip with Universal Short Range Port ..... **+\$5,280**  
**Opt. 09** – Equip with Multimode (62.5 µm) Short Range Port ..... **+\$5,485**  
**Opt. MC** – Equip with Multimode (50 µm) Short Range Port ..... **+\$5,995**  
**Opt. MM** – Equip with Long Range and Multimode (62.5 µm) Short Range Ports ..... **+\$8,645**  
**Opt. MN** – Equip with Long Range and Multimode (50 µm) Short Range Ports ..... **+\$9,155**

With each FiberScout® ordered, select one of the connector options:

**CONNECTOR OPTIONS – LONG RANGE**  
**Opt. 20** – Biconic ..... **NC**  
**Opt. 21** – FC ..... **NC**  
**Opt. 22** – D4 ..... **NC**  
**Opt. 24** – ST ..... **NC**  
**Opt. 25** – DIN ..... **NC**  
**Opt. 28** – SC ..... **NC**

### CONNECTOR OPTIONS – UNIVERSAL SHORT RANGE

**Opt. 30** – Biconic ..... **NC**  
**Opt. 31** – FC ..... **NC**  
**Opt. 32** – D4 ..... **NC**  
**Opt. 34** – ST ..... **NC**  
**Opt. 35** – DIN ..... **NC**  
**Opt. 38** – SC ..... **NC**

### CONNECTOR OPTIONS – MULTIMODE SHORT RANGE

**Opt. 40** – Biconic ..... **NC**  
**Opt. 41** – FC ..... **NC**  
**Opt. 42** – D4 ..... **NC**  
**Opt. 44** – ST ..... **NC**  
**Opt. 45** – DIN ..... **NC**  
**Opt. 46** – SMA 905/906 ..... **NC**  
**Opt. 48** – SC ..... **NC**

### AC/DC POWER SUPPLY OPTIONS

The FiberScout® is equipped for use in the U.S.A. and Canada. If use is for other than in the U.S.A. or Canada, order one of the following options:

**Opt. 1C** – 220 V AC/DC Power Supply (Europe) ..... **NC**  
**Opt. 2C** – 240 V AC/DC Power Supply (UK) ..... **NC**

### SERVICE ASSURANCE OPTIONS

**REP4400** – Provides one year of post-warranty Repair Protection ..... **+\$130**  
**CAL4400** – Provides one year of Calibration Services ..... **+\$145**

**Note:** Units are not modular or customer modifiable. Any change in capability from originally ordered configuration, if available, must be performed by the factory or authorized Tektronix service center. Additional charges will apply.

To order, contact your local sales office (listed on the inside back cover) or call the National Marketing Center at 1-800-833-9200.

