

## RXT-4111 DWDM OTDR Module



## RXT-1200 Modular Test Platform



The RXT-4111 test module for the VeEX® RXT-1200 platform features a tunable DWDM OTDR for testing optical Mux/Demux to verify channel routing and end to end connectivity. Multi-service DWDM networks can be verified with a single test platform ensuring maximum test productivity.



### Platform Highlights

#### Software

- Advanced software architecture supports simultaneous test applications
- VeExpress™ Cloud or Enterprise server versions to maintain instrument firmware and manage test assets or inventory
- ReVeal™ PC software to manage test configurations, and remote control
- Fiberizer Desktop PC software for advanced trace analysis and report generation
- Fiberizer Cloud trace analysis and data management
- R-server support for centralized work force management and test results repository
- Optional Fiber Inspection Scope (USB) support with V-Scope function

#### Hardware

- High resolution, 7" full color TFT touch-screen viewable in any lighting condition
- Connectivity via 10/100Base-T Management interface, WiFi™, Bluetooth®, or 3G Card for back office applications
- Intelligent fan operation with built-in temperature sensor
- Interchangeable Li-ion battery pack for extended test time
- USB-A Interface for USB flash drives, USB wireless dongles and fiber inspection probe connection
- Optional built-in GPS module for Geotagging OTDR traces

### Key Features

#### Optical Testing

- Test DWDM Mux/Demux at ITU-T G.694.1 wavelengths
- C-band tuning (standard 89 channels at 50 GHz spacing)
- Optional extended band tuning to Channel 62 with 50 GHz spacing
- Integrated wavelength locker stable to within  $\pm 2.5$  GHz
- High dynamic range for long haul fibers and testing through DWDM multiplexers/OADMs/de-multiplexers
- Sampling points up to 128,000
- Advanced TEC laser stabilization for hot and cold weather operating conditions
- Optimized test parameters for best in class dead zones
- Event dead zone < 1m, Attenuation dead zone < 4m
- Telcordia GR-196 and SR-4731.sor file formats
- Optional V-Scout mode – Intelligent Link Mapping using intuitive icons derived from multiple test acquisitions
- Optional DWDM Light Source via OTDR port
- Push/Pull OTDR traces and Fiberscope images directly to Fiberizer Cloud via wired or wireless internet connection
- Built-in launch fiber to characterize OTDR connections and short fiber spans
- Universal 2.5 mm optical interfaces with inter-changeable optical adaptors (SC/FC/ST/LC)



Add value with  
**Fiberizer Cloud**  
[www.fiberizer.com](http://www.fiberizer.com)

## DWDM

Dense Wavelength Division Multiplexing (DWDM) is a transmission technology that multiplexes multiple optical carrier signals on a single fiber by using different wavelengths (colors).


The ITU-T G.694.1 frequency grid specifies the DWDM wavelengths in the C-band (1525-1565 nm) and L-band (1565-1620 nm). The most popular implementation occurs in the Conventional or C band which has the ability to transport up to 80 wavelengths in the 1550 nm region - the spectrum supports the lowest attenuation and best amplification efficiency with erbium-doped fiber amplifiers (EDFA).

Leveraging the powerful “tried-and-tested” RXT-1200 platform, the RXT-4111 OTDR module tackles DWDM network test challenges head-on.

### Test Application

Telco, Mobile and CATV operators offering or utilizing DWDM technology need to characterize, maintain and troubleshoot these fiber networks using new OTDR test methods

- Networks need to be verified at the discrete ITU G.694.1 wavelengths
- End-to-end loss through multiplexers, OADM and de-multiplexers needs to be checked
- Attenuation and Macrobending can be verified across the C-band
- End-to-end continuity testing using stable source should be performed prior to service turn up
- Wavelength provisioning - verify new wavelength services and routes without disrupting traffic on active channels

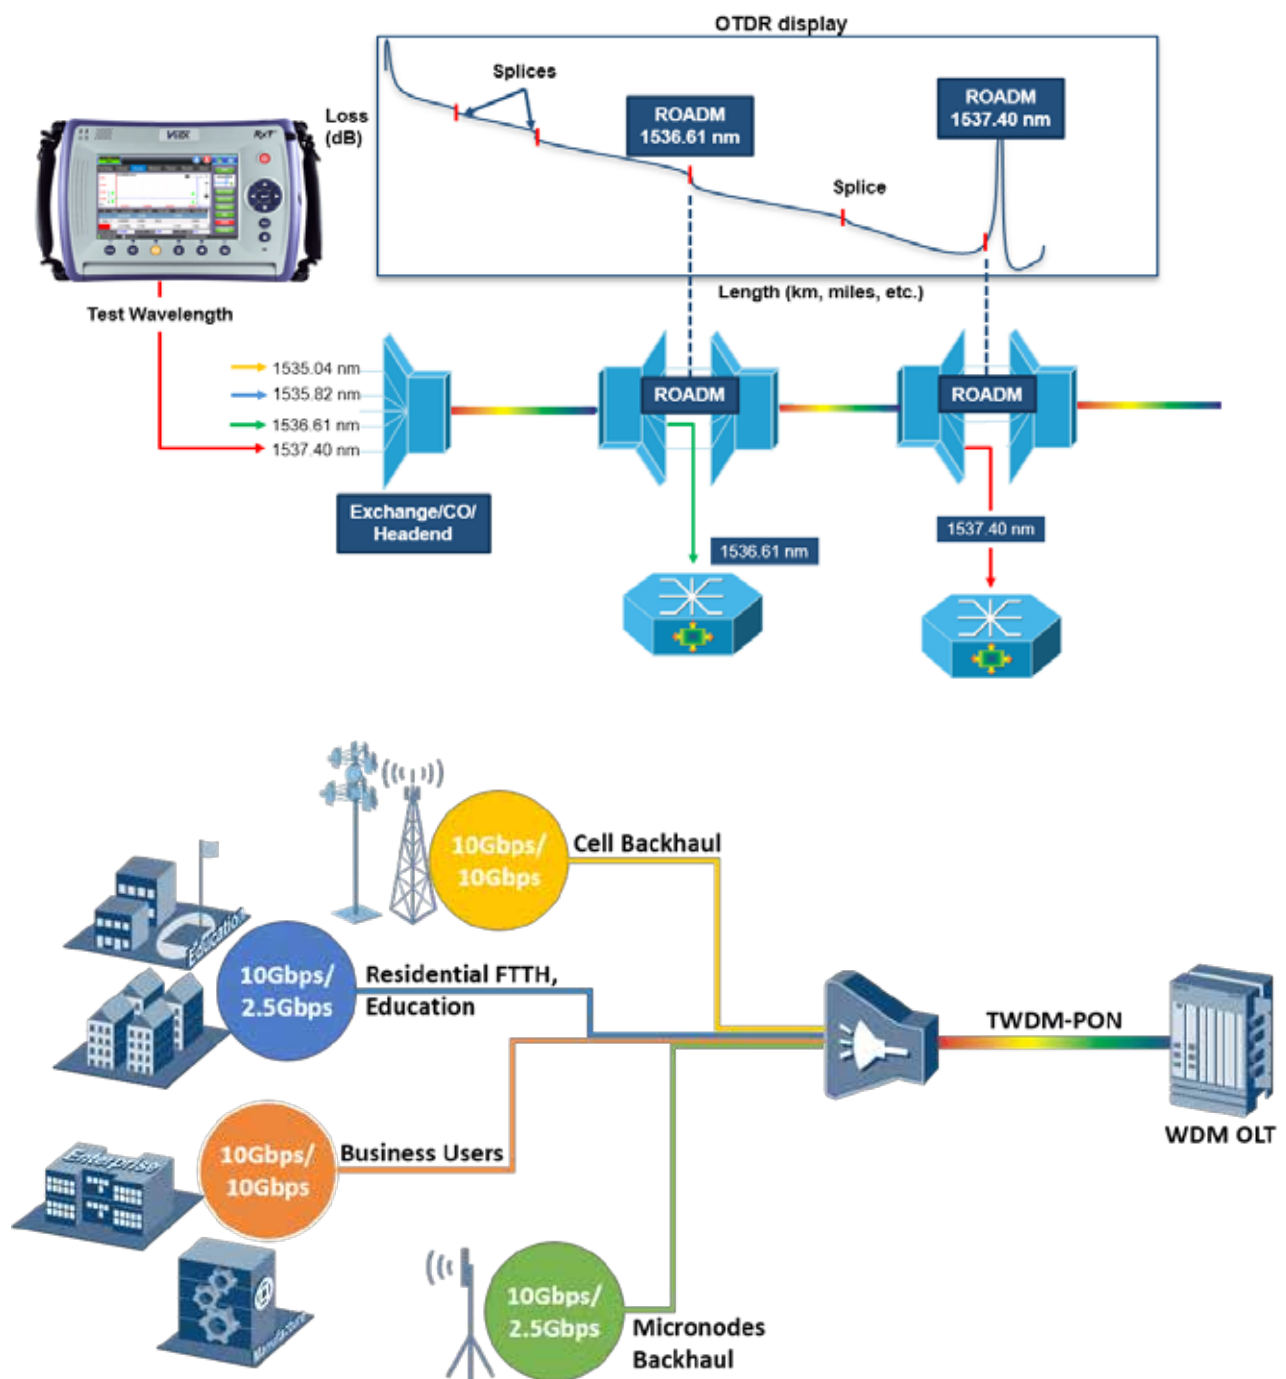

# Optical Time Domain Reflectometer (OTDR)

## Intuitive Test Setup

An intuitive menu structure offers simple test setup for Novice and Expert users alike. Test parameters can be configured manually by the user or set automatically by the unit.

Up to 89 x DWDM wavelengths at 50 GHz spacing in the C-band are supported via a very precise and stable tunable laser. Channel spacings of 100 GHz, 200 GHz and custom tables are also supported.



## Analysis Thresholds

User defined thresholds for splice loss, connector loss, fiber lengths and reflectance can be preset to assess a fiber's condition. Color coding used in the event table will display events exceeding Pass/Fail thresholds and alert technicians of a potential problem.



## V-Scout Link Mapping

Advanced algorithms evaluate separate acquisitions and characterize the fiber span using intuitive symbols. Each individual acquisition can be customized and user defined as a test profile depending on network type or application. This optional feature eliminates event interpretation and provides greater analysis confidence to the user, regardless of OTDR skill set.



## Advanced Trace Analysis

Reliable event detection and accurate analysis are crucial to document fiber links at the time of installation. These baseline records are essential to troubleshooting faulty networks and reducing system downtime afterwards.




The DWDM OTDR employs specialized software algorithms developed from decades of experience to measure fiber attenuation including anomalies such as connectors, splices, and macro-bends. Precise location and analysis of ROADM network elements is also supported.



## OTDR Results

OTDR Traces are saved in Telcordia SR-4731 format in a logical hierarchy for easy sorting and storage.

Traces can be pushed directly to Fiberizer Cloud using any available internet connection or can be pulled for fault finding and reference purposes.

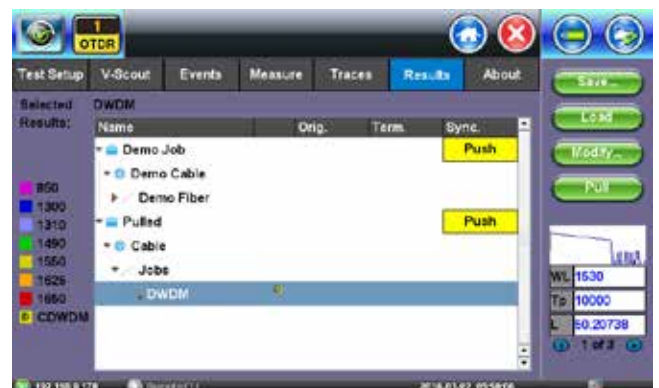

## OTDR Trace Analysis and Documentation

### Fiberizer™ Desktop

Fiberizer Desktop is a standalone PC software application to analyze traces acquired by the RXT-4111 OTDR. Supplied as a standard accessory, Users can edit traces manually, create event tables, generate reports using built-in templates and much more. This viewer displays trace files conforming to Telcordia (Bellcore) GR-196 & SR-4731 \*.sor formats, and offers both 2-point and 5-point loss measurement modes. It also supports batch processing, a very useful feature for analyzing multiple fibers in a single cable. The software does not require Internet access to operate, but it can be interfaced with Fiberizer Cloud OTDR trace viewer at any time.

### Work from Anywhere, Anytime

#### Fiberizer™ Cloud

Fiberizer Cloud not only empowers the OTDR, but also the Workforce. Going way beyond traditional OTDR reporting methods or concepts, this cloud-based solution provides superior centralized test data management capabilities including powerful web based trace analyses. You can work from almost anywhere, at anytime because Fiberizer Cloud is a full online web service.

#### Streamlining onsite data reporting

Fiber technicians and contractors tasked to validate new fiber installations or restoring cable routes after an outage are generally obliged to submit measured data (.sor files) and related documentation to the network operator as proof of delivery before being paid. Valuable time however is often wasted after the onsite work is completed, because critical test files are usually first stored to some local storage media before being transferred to a colleague via email for verification and further reporting.

Fiberizer Cloud streamlines this information exchange, eliminating costly paper, e-mail or other time consuming communication methods - instead, time wastage can be avoided by transferring traces of jobs completed directly from the OTDR to Fiberizer Cloud. Professional PDF or MS Excel reporting functionality is also available, and users can create their own templates for reports. Bi-directional analysis of OTDR traces, tested from both ends of the optical fiber, can also be performed.



#### Fiberizer Cloud Connectivity

Pair the RXT-4111 OTDR Multiservice tester via Bluetooth to a mobile Smartphone, Laptop or Tablet PC and efficiently upload OTDR test data directly to the Cloud server using any available wireless technology (3G, WiFi).

#### Total Compatibility

Fiberizer Cloud is compatible with both Windows and MacOS browsers, not limiting users to PC platforms only. OTDR trace files in Telcordia (Bellcore) GR-196 & SR-4731 \*.sor formats are securely transferred via HTTPS connection, a fast reliable communication protocol commonly used in today's Internet applications. Another outstanding feature is compatibility with other OTDR vendor trace data formats, so users can reference or compare other OTDR traces and vice versa.



OTDR Parameter	
Wavelength (nm) - Tunable range	C-band standard: 1563.86 to 1528.77; extended option to 1527.99
Wavelength (THz)	Standard: 191.70 to 196.10; extended option to 196.2
Wavelength Accuracy (± GHz)	± 2.5
Channel Spacing per ITU-T 694.1 grid (GHz)	50, 100, 200 or Custom table
Number of Channels	89 (standard); Channel 62 optional
Side-Mode Suppression Ratio (SMSR) (dB)	40 (min)
Dynamic Range (dB) <sup>2</sup>	42
Pulse Widths (ns)	3, 10, 25, 100, 300, 500, 1000, 3000, 10000, 20000
Event Dead Zone (m) <sup>3</sup>	< 1
Attenuation Dead Zone (m) <sup>4</sup>	< 4
Distance Display Range (km)	0.5 to 240
Distance Units	Kilometers, Meters, Kilofeet, Feet, Miles
Distance Accuracy (m) <sup>5</sup>	± (0.5 + resolution + 2x10 <sup>-5</sup> x L)
Sampling Resolution (m)	0.16 to 7.8
Sampling Points	Up to 128,000
Loss Readout Resolution (dB)	0.001
Attenuation Linearity (dB/dB)	± 0.05
Group Index Range (IoR)	1,3000 to 1,7000
Measurement Time	Fixed time intervals, Auto and Real Time (Live)
Internal Memory Capacity (SD card)	>5,000 traces, Bellcore GR196 and Telcordia SR-4731 sor format
Fiber Analysis	Automatic, event table, user defined PASS/FAIL thresholds
Intelligent Link Mapping (V-Scout)	Intelligent Link Mapping using intuitive icons derived from multiple test acquisitions
Fiber Type	Single mode, 9/125 μm
OTDR Laser Safety	IEC 60825-1, Class 1M
Optical Connectors (OTDR/LS)	Fixed or Universal 2.5 mm, UPC or APC interface, FC/SC/ST/LC adaptors optional

Hardware Options
Light Source
Extended channel tuning range includes Channel 62

**Notes:**

1. Unless noted, all specifications are valid at 23°C ± 2°C (73.4°F ± 3.6°F) using FCUPC connectors
2. Typical dynamic range after three-minute averaging and SNR = 1
3. Typical dead zone using 3 ns pulse and reflections below -45 dB
4. Typical dead zone using 3 ns pulse and reflections below -55 dB
5. Excludes uncertainty due to fiber refractive index (IoR) setting

General Specifications			
Size	290 x 140 x 66 mm (W x H x D) 11.40 x 5.50 x 2.60 in	Display	TFT 7" full color touch-screen display
Weight	Less than 3 kg (less than 6.6 lb)	Ruggedness	Survives 1m drop to concrete on all sides
Battery	Li-ion smart battery, 5200 mAh 10.8 VDC	Management Interfaces	USB, RJ45, 10/100-T Ethernet, Bluetooth (optional), Data Card/GPS (optional) WiFi (optional)
Power Supply (AC Adaptor)	Input: 100-240 VAC, 50-60 Hz Output: 16 VDC, 5.5 A	Languages	Multiple languages supported
Operating Temperature	0°C to 50°C (32°F to 113°F)	System Memory	128 Mbyte RAM, 2 Gbyte SD
Storage Temperature	-20°C to 70°C (-4°F to 158°F)		
Humidity	5% to 95% non-condensing		



VeEX Inc.  
2827 Lakeview Court  
Fremont, CA 94538 USA  
Tel: +1.510.651.0500  
Fax: +1.510.651.0505  
www.veexinc.com  
customercare@veexinc.com

© 2017 VeEX Inc. All rights reserved.  
VeEX is a registered trademark of VeEX Inc. The information contained in this document is accurate. However, we reserve the right to change any contents at any time without notice. We accept no responsibility for any errors or omissions. In case of discrepancy, the web version takes precedence over any printed literature.  
D05-00-113P C00 2017/04