

## Hand-Held Core-Alignment Fusion Splicer

**NEW**


### S178A ver.2 NEW features

The S178A Hand-Held Core-Alignment Fusion Splicer has been enhanced and updated to version 2. The battery is automatically charged internally when connected to AC mains power even during operation. The new illumination lamp lights up a wide area around the V-grooves and helps operation in low light environment. The redesigned and strengthened heater simplifies the protection sleeve loading process.

### Features and applications

The S178A is fast and durable, it continues the FiTeL tradition of quality and excellence by delivering precise and accurate splices even under rigorous field conditions.

The S178A is equipped with a core alignment system that can complete a splice in 7 seconds (semi-auto mode) and an integrated heater which can shrink a protection sleeve in 25 seconds (pre-heat mode). The USB 2.0 mini interface speeds up PC communication and image / video transfer, whilst enhancing reliability.

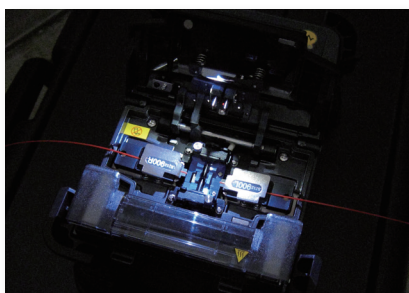

Although the S178A is significantly smaller and lighter in weight than previous models, its canopy design, durable metal body frame and rubber protection corners provide robust protection. This enables use in demanding environments without compromising splicing performance. Along with its rugged durability, the splicer also offers convenience. An internal battery system allows up to 200 splicing cycles (splicing/heating) and an innovative, mirror-free alignment system reduces maintenance work.

The S178A is a versatile choice for a wide range of applications including FTTx, LAN, backbone, enterprise, long-haul installations, data-center and OEM. It is an excellent option for use in the conventional telecommunications industry, along with other industries (including oil and gas and outside broadcast).



## Key features

- NEW Internal battery charging**
- NEW Illumination lamp** lights up a wide area around V-grooves
- NEW User friendly LCD display** offers 4 different X/Y image layouts
- NEW Simplified splice result indicator** red / green icon
  - **Rugged and compact handheld design** to endure harsh environmental conditions
  - **Fast splice (7 sec)** at super low loss and **Fast Heating (25 sec)<sup>\*1</sup>**
  - **200 cycles (Splicing & Heating)** with Internal batteries<sup>\*2</sup>
  - **Splice programs available for All METRO/LAN/FTTx fibers** including ultra bend-insensitive fibers (e.g. EZ-Bend™)
  - **Splicer is compatible with the Seikoh Giken and Diamond Splice-on-connector (SOC)**
  - **Easy maintenance** electrode replacement /mirror free alignment system
  - **Easy software upgrade** via the Internet
- NEW Simplified program fusion and heater programming**
  - **Easily exchanged fiber holder systems** (Tight holder/Removable fiber holder/SOC holder)
  - **PC interface software** to allow user manage splicing recipes and splicing results
  - **Auto-start** heater oven option
- NEW Improved GUI** enhancing ease-of-use
  - **Large memory** for storing 2,000 splice records and last 100 splice result images
  - **RoHS compliant**

<sup>\*1</sup> By using semi-auto mode for splicing and pre-heating mode for heating.

<sup>\*2</sup> By using 2-batteries, semi-auto mode for splicing and regular mode for heating.



### FTEL Splicer SOC partners



## Under Tough Environment

S178A passed criteria as below <sup>\*3</sup>;

- **Drop Resistance** - 76 cm Drops from 5 different angles
- **Water Resistance** - IPX2 rating drip proof <sup>\*4</sup>
- **Dust Resistance** - IP5X rating dust proof <sup>\*5</sup>

<sup>\*3</sup> Above tests were performed at Furukawa Electric Co., Labs, and do not guarantee that the machine will be undamaged under these conditions.

<sup>\*4</sup> IPX2 rating drip proof means that the machine can be exposed to 3 mm/min drip from 4 different angles with 15° tilt for 2.5 min each and still functions.

<sup>\*5</sup> IP5X rating dust proof means that the machine can be exposed to dust particles with a diameter of 0.1 to 25 µm for 8 hours and still functions.



Drop Resistance



Water Resistance



Dust Resistance





## SPECIFICATIONS

<b>Applicable Fibers</b>	SM, MM, DSF, NZD, EDF, BIF/UBIF (Bend insensitive fiber)
<b>Cladding Diameter</b>	80~150 $\mu\text{m}$
<b>Coating Diameter</b>	100~1,000 $\mu\text{m}$
<b>Fiber Cleave Length</b>	5~16 mm
<b>Average Splice Loss</b>	SM: 0.02 dB, MM: 0.01 dB, DSF: 0.04 dB, NZD: 0.04 dB
<b>Splice Time</b>	7 seconds (semi-auto mode) 9 seconds (regular mode)
<b>Heat Time</b>	25 seconds* <sup>6</sup> (S922: 40 mm Sleeve, S921: 60 mm Sleeve) (Pre-heat mode) 31 seconds* <sup>6</sup> (S922: 40 mm Sleeve, S921: 60 mm Sleeve) (regular mode)
<b>Splice Programs</b>	Max. 150
<b>Automatic Splicing Selection</b>	SM: SM, DSF, NZD, BIF/UBIF, MM: MM
<b>Heat Programs</b>	Max. 18
<b>Automatic Heating Start</b>	Available
<b>Applicable Sleeves</b>	20/40/60 mm
<b>Fiber Holding</b>	Tight holder (Loose tube applicable) or Removal Fiber Holder System
<b>Tension Test</b>	1.96 N
<b>Return Loss of Splice</b>	60 dB or greater
<b>Attenuation Splice Function</b>	Intentional high splice loss of 0.1 dB to 10 dB (0.1 dB step) can be made for an inline fixed attenuator
<b>Fiber Image Magnification</b>	304X, 608X
<b>Splice Memory</b>	Max. 2,000
<b>Image Capture Capacity</b>	Last 100 images to be automatically captured + Up to 24 images to be stored permanently
<b>Dimension</b>	127W $\times$ 199D $\times$ 105H mm (not including shock absorber) 159W $\times$ 231D $\times$ 130H mm (including shock absorber)
<b>Weight</b>	1.9 kg (without battery) 2.3 kg (with two batteries)
<b>Monitor</b>	3.5" color LCD monitor
<b>Data Output</b>	USB ver.2.0 mini
<b>Battery Capacity</b>	Typical 80 splice/heat cycles with single battery* <sup>7</sup> Typical 200 splice/heat cycles with 2 batteries* <sup>8</sup>
<b>Altitude</b>	5,000 m
<b>Wind Protection</b>	Max. wind velocity of 15 m/s.
<b>Operating Temperature</b>	-10 to +50°C (0 to 95% Relative Humidity [Non-Condensing])
<b>Storage Temperature</b>	-40 to +60°C (0 to 95% Relative Humidity [Non-Condensing])
<b>Humidity</b>	0 to +95% RH (non-condensing)
<b>Power Source</b>	AC Input 100 to 240 V (50/60 Hz), DC Input 11 to 17 V without any change of hardware

\*<sup>6</sup> The first heating after turning on the power can be longer than the usual heating time.

\*<sup>7</sup> The number of the splicing and heating the machine can produce using a fully charged brand new battery at room temperature of 20°C, semi-auto mode for splicing and regular mode for Heating. Depending on the condition of the batteries and operation environment, the number can vary.

\*<sup>8</sup> The number of the splicing and heating the machine can produce using 2 fully charged brand new batteries at room temperature of 20°C, semi-auto mode for splicing and regular mode for Heating. Depending on the condition of the batteries and operation environment, the number can vary.

## STANDARD PACKAGE

Item	P/N	Quantity
① S178A Main Body	S178-A-A-0001	1
② Hard Carrying Case	HCC-01	1
③ Battery Pack Depending on the package	S943B	1 or 2
④ Spare Electrodes	S969	1pair
⑤ AC Adaptor for S178A and S958C	S976B	1
⑥ AC Cable Cord	—	1
⑦ Electrode Sharpener	D5111	1
⑧ Cleaning Brush	VGC-01	1
⑨ Tool case	TCC-01	1
User Manual	FTS-B405	1



## OPTIONAL COMPONENTS

Item	P/N	Quantity
① Soft Carrying Case	SCC-01	1
② Battery Charger	S958C	1
③ AC Adaptor for S958C	S977A	1
④ Cooling Tray	CTX-01	1
⑤ Angled Stand	AGS-01	1
⑥ Working Belt	WBT-01	1
⑦ USB Cable	USB-01	1
⑧ Car Cigarette Cable	CDC-01	1
⑨ Tripod Adapter	TPA-01	1
⑩ Tight Holder		
16 mm Cleave length	S712T-016	1pair
10 mm Cleave length	S712T-010	1pair
⑪ Removal Fiber Holder		
160 μm coating diameter fiber	S712S-160	1pair
250 μm coating diameter fiber	S712S-250	1pair
500 μm coating diameter fiber <sup>*9</sup>	S712S-500	1pair
900 μm coating diameter fiber	S712S-900	1pair
Loose Tube Fiber (Left side)	S712S-LT-L	1
Loose Tube Fiber (Right side)	S712S-LT-R	1
⑫ SOC Holder		
<For Ferrule>		
Seikoh Giken FC/SC connector (9 mm)	S712C-SGS9-L	1
Seikoh Giken FC/SC connector (5 mm)	S712C-SGS5-L	1
Seikoh Giken LC connector (9 mm)	S712C-SGL9-L	1
Seikoh Giken LC connector (5 mm)	S712C-SGL5-L	1
Diamond E-2000™/F-3000™ LC/SC connector	S712C-DM25-L	1
<For Cordage>		
Seikoh Giken Cordage (5 mm)	S712C-SGC5-R	1
Seikoh Giken Cordage (9 mm)	S712C-SGC9-R	1
Diamond Cordage (5 mm cleave, 1.8~3 mm cordage)	S712C-DMC5-R	1
<Tool>		
Diamond Mount	WTX-01	1
Smart Fuse		
Software Interface for Machine	SF-01	1

\*9 Used for 400-500 μm cladding diameter fiber.



⑤ Angled Stand in Action



⑥-1 Working Belt in Action



⑥-2 Working Belt in Action

## ORDERING NUMBER FORM S178A-(X1)-(X2)

Category	Code	Remark
X1	Fiber Holder Type	1 16 mm Tight Holder S712T-016
		2 10 mm Tight Holder S712T-010
		3 Fiber Holder System
X2	Number of Battery Pack (S943B)	1 1 pack
		2 2 packs

The Furukawa Electric Group strives to develop environmentally considerate products.



### eFriendly Logo Mark

This logo mark indicates that the products and services satisfy the standards of environmentally friendly products of the Furukawa Electric Group.



Our Group has configured the environmental management system at each of our plants worldwide, and acquired ISO14001 certification.

### Contact Us :

## FURUKAWA ELECTRIC CO., LTD.

### Head Office:

2-3, Marunouchi 2-chome,  
Chiyoda-ku, Tokyo,  
100-8322, Japan  
TEL: + 81 3 3286 3227  
FAX: + 81 3 3286 3978  
www.furukawa.co.jp  
comsales@ho.furukawa.co.jp

### Europe:

#### Furukawa Electric Europe Ltd.

Furukawa House  
77-85 Fulham Palace Road,  
London W6 8JD, U.K.  
Tel: + 44 (0) 20 7313 5300  
Fax: + 44 (0) 20 7313 5310  
www.furukawa.co.uk  
splicers@furukawa.co.uk

### North & South America:

#### OFS Fitel, LLC

2000 Northeast Expressway  
Norcross, Georgia 30071, U.S.A  
TOLL FREE: + 1 866 452 9516  
Tel: + 1 678 783 1090  
Fax: + 1 678 783 1093  
www.ofsoptics.com  
splicers@ofsoptics.com

### China:

#### Furukawa Shanghai, Ltd.

Beijing Branch  
Room 1108 Beijing Jing Guang  
Center Hujialou Chaoyang  
District Beijing 100020, China  
Tel: + 86 10 8591 0608  
Fax: + 86 10 8591 0609  
www.furukawa-sh.cn

### South East Asia:

#### Furukawa Electric Singapore Pte. Ltd.

60 Albert Street, #13-10 OG  
Albert Complex, Singapore  
189969  
Tel: + 65 6224 4686  
Fax: + 65 6336 2635  
comms@furukawa.com.sg

### Export Control Regulations

The products and/or technical information presented in this publication may be subject to the application of the Foreign Exchange and Foreign Trade Act and other related laws and regulations in Japan.

In addition, the Export Administration Regulations (EAR) of the United States may be applicable.

In cases where exporting or reexporting the products and/or technical information presented in this publication, customers are requested to follow the necessary procedures at their own responsibility and cost.

Please contact the Ministry of Economy, Trade and Industry of Japan or the Department of Commerce of the United States for details about procedures.

\* Furukawa Electric reserves the right to improve, enhance, or modify the features and specifications of FTEL products without prior notification.

\* Company and product names appearing in this catalogue are resistered marks or trademarks of respective companies.

\* This catalogue is printed using environmentally friendly paper and ink.

AC2T-120025

JE-214 2G4 TR 200